



**DESCRIPTION: 40W 1.5KVDC Isolated Wide Input Voltage DC/DC Converters**

The rated output power of PP40DG converters is 40W, 2:1, 4:1 input voltage range ,the voltage range is 9V-18V, 18V-36V, 36V-72V, 9-36V, The accuracy of the converter can reach ±1%, it can be widely used in telecommunications, railway transportation, instrument and etc.

**FEATURES**

40W output power	2:1, 4:1 input voltage range	Input under voltage protection
Long term short-circuit protection	Fixed switching frequency	Super capability with capacitive load
Operating temperature: -40°C to 85°C	RoHS compliance	/

**SELECTION GUIDE**

Part Number	Input Voltage		Output		Efficiency(Typ.) %	
	voltage (VDC)		Voltage (VDC)	Current (A)		
	Rated	Range values				
PP40DG12S05	12(2:1)	9-18	5	8	83	
PP40DG12S12	12(2:1)	9-18	12	3.33	86	
PP40DG12S15	12(2:1)	9-18	15	2.67	86	
PP40DG12S24	12(2:1)	9-18	24	1.67	85	
PP40DG24S05	24(2:1)	18-36	5	8	84	
PP40DG24S12	24(2:1)	18-36	12	3.33	87	
PP40DG24S15	24(2:1)	18-36	15	2.67	87	
PP40DG24S24	24(2:1)	18-36	24	1.67	86	
PP40DG24S05W	24(4:1)	9-36	5	8	84	
PP40DG24S12W	24(4:1)	9-36	12	3.33	87	
PP40DG24S15W	24(4:1)	9-36	15	2.67	87	
PP40DG24S24W	24(4:1)	9-36	24	1.67	86	
PP40DG24D05	24(2:1)	18-36	±5	±4	83	
PP40DG24D12	24(2:1)	18-36	±12	±1.67	86	
PP40DG24D15	24(2:1)	18-36	±15	±1.33	86	
PP40DG48S05	48(2:1)	36-72	5	8	84	
PP40DG48S12	48(2:1)	36-72	12	3.33	87	
PP40DG48S15	48(2:1)	36-72	15	2.67	87	
PP40DG48S24	48(2:1)	36-72	24	1.67	86	
PP40DG48D05	48(2:1)	36-72	±5	±4	83	
PP40DG48D12	48(2:1)	36-72	±12	±1.67	86	
PP40DG48D15	48(2:1)	36-72	±15	±1.33	86	

Input voltage 9-18VDC, start-up voltage 9.5-18VDC , input voltage 9-36VDC ,start-up voltage 9.5-36VDC.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

**GENERAL CHARACTERISTICS**

parameter	Test conditions	Min	Typ	Max	Units
Isolation voltage	Input to output		500	1500	VDC
Insulation resistance	Input to output	100M			Ohm
Seismic	10~55Hz		5		G
MTBF	MIL-HDBK-217F2		5x10 <sup>5</sup>		hrs
Over-current protection mode	All input range		Burp, Automatic recovery		
Cooling		Free air convection			
Case material		Metal case			

**INPUT CHARACTERISTICS**

parameter	Test conditions	Min	Typ	Max	Units
Input voltage	12V Input module(9V-18V)	9.5	12	18	VDC
Input voltage	24V Input module(18V-36V)	18	24	36	VDC
Input voltage	48V Input module(36V-72V )	36	48	72	VDC
Input voltage	24V Input module(9V-36V)	9.5	24	36	VDC
Startup time	Output rise time from 5% to 100%	20			ms
Remote control CTL	Remote CTL-Vin		Turn off		
Remote control CTL	Remote CTL NC(The control level 12V-40V)		Turn on		

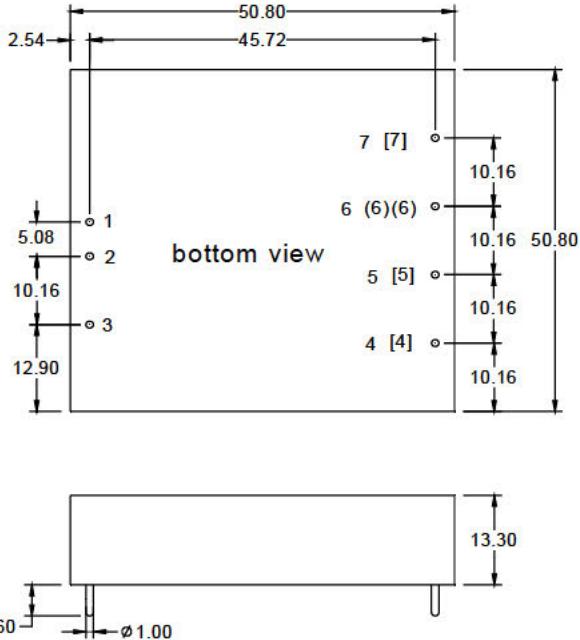
**OUTPUT CHARACTERISTICS**

parameter	Test conditions	Min	Typ	Max	Units
Voltage accuracy	$I_o=0.1 \dots 1.0 \times I_{nom}$ $V_i=V_i$ rated			$\pm 1$	%
Line regulation	$V_{imin} \leq V_i \leq V_{imax}$			$\pm 0.2$	%
Load regulation	$I_o=0.1 \dots 1.0 \times I_{nom}$ $V_{imin} \leq V_i \leq V_{imax}$			$\pm 0.5$	%
Auxiliary voltage accuracy	Main Load and auxiliary load differ 25%, the auxiliary circuit of the load with at least 25%, the main circuit with full load			$\pm 3$	%
Ripple and noise	20MHz bandwidth			$\pm 1$	%
Over-current protection	$V_{imin} \leq V_i \leq V_{imax}$	120			%
Output voltage trim range	$V_{imin} \leq V_i \leq V_{imax}$			10	%
Transient recovery time	25% load changes			$\pm 5$	%
Transient overshoot time	25% load changes			400	us
Switch frequency	$V_{imin} \leq V_i \leq V_{imax}$		300		KHz

**ENVIRONMENT CHARACTERISTICS**

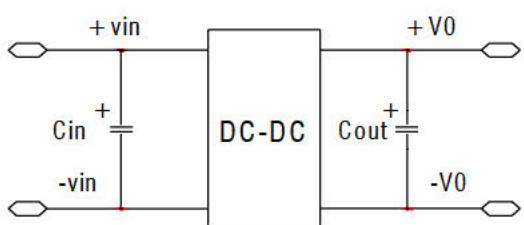
parameter	Test conditions	Min	Typ	Max	Units
Storage Humidity	Non condensing	5		+95	%
Operating Temperature	Power derating (above 71°C)	-40		+85	°C
Storage Temperature		-55		+125	°C
Max. Case Temperature	Operating Temperature curve range			105	°C
Lead Temperature	1.5mm from case for 10 seconds			300	°C
Cooling		Free air convection			

- Module in every environment temperature rating, case temperature under shall not exceed the maximum case temperature level.

MECHANICAL DIMENSIONS		PIN CONNECTIONS																																								
DIP Package																																										
 <b>bottom view</b>		<table border="1"> <thead> <tr> <th>Pin</th><th>Single output</th><th>Dual output</th></tr> </thead> <tbody> <tr> <td>1</td><td>+Vin</td><td>+Vin</td></tr> <tr> <td>2</td><td>-Vin</td><td>-Vin</td></tr> <tr> <td>3</td><td>CTL</td><td>CTL</td></tr> <tr> <td>4</td><td>TRM</td><td>TRM</td></tr> <tr> <td>[4]</td><td>/</td><td>/</td></tr> <tr> <td>5</td><td>-Vout</td><td>-Vout</td></tr> <tr> <td>[5]</td><td>/</td><td>/</td></tr> <tr> <td>6</td><td>+Vout</td><td>/</td></tr> <tr> <td>(6)</td><td>/</td><td>COM</td></tr> <tr> <td>[6]</td><td>/</td><td>/</td></tr> <tr> <td>7</td><td>/</td><td>+Vout</td></tr> <tr> <td>[7]</td><td>/</td><td>/</td></tr> </tbody> </table>		Pin	Single output	Dual output	1	+Vin	+Vin	2	-Vin	-Vin	3	CTL	CTL	4	TRM	TRM	[4]	/	/	5	-Vout	-Vout	[5]	/	/	6	+Vout	/	(6)	/	COM	[6]	/	/	7	/	+Vout	[7]	/	/
Pin	Single output	Dual output																																								
1	+Vin	+Vin																																								
2	-Vin	-Vin																																								
3	CTL	CTL																																								
4	TRM	TRM																																								
[4]	/	/																																								
5	-Vout	-Vout																																								
[5]	/	/																																								
6	+Vout	/																																								
(6)	/	COM																																								
[6]	/	/																																								
7	/	+Vout																																								
[7]	/	/																																								
Units: mm Pin diameter tolerances: $\pm 0.1\text{mm}$ General Tolerance: $\pm 0.5\text{mm}$																																										

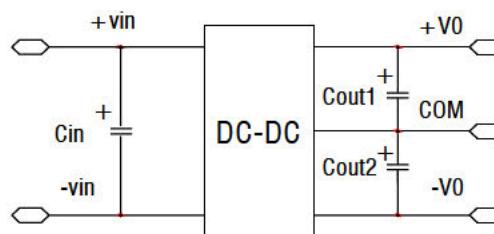
MODEL SELECTION							
PP	40	D	G	12	S	05	W

W: 4:1 Wide voltage input range  
 Output voltage  
 S: Single output    D: Dual output  
 Input Rated Voltage  
 Package type  
 DC-DC  
 Output rated power  
 Brand name

RECOMMEND CIRCUIT
Single Output


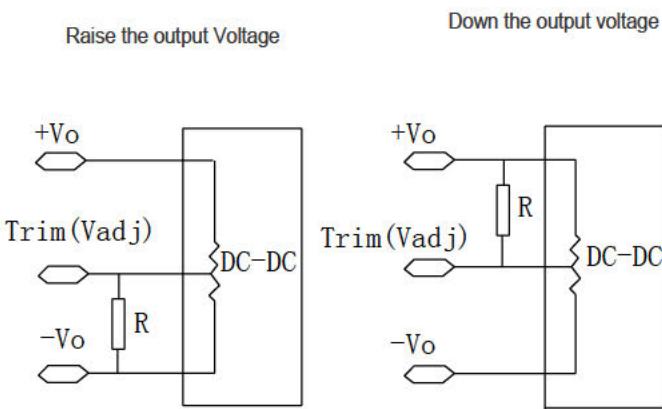
## RECOMMEND CIRCUIT

Dual Output:



- Add input capacitance  $C_{in}$  is helpful to improve the electromagnetic compatibility, recommend  $C_{in}$  use 47  $\mu F$ -100 $\mu F$  of the electrolytic capacitors.
- If the module connect to the digital circuits, please add the  $C_{out}$ ,  $C_{out1}$ ,  $C_{out2}$ .
- If  $C_{out}$ ,  $C_{out1}$ ,  $C_{out2}$  value is too high or lower ESR, it will cause the module unstable,
- The recommended value of  $C_{out}$ ,  $C_{out1}$ ,  $C_{out2}$  should be 100  $\mu F/A$ , the current here means the output current.

## Trim application & Trim Resistance



- In dual and triple output modules, this application can just used in the main load(auxiliary road change together with the main load)

## USING ATTENTIONS

- Module will cause irreversible damage when in the state of the input reverse polarity.
- Module will cause irreversible damage when in the long-term overload conditions.
- Module will cause irreversible damage when out of the maximum input voltage range.