


PCB Connectors PRESS-FIT

Serie TP-SERH

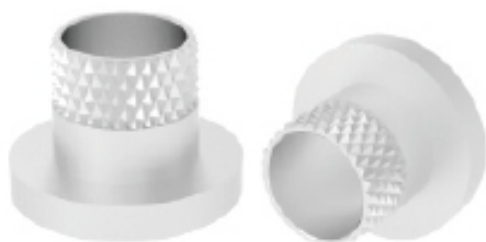


TP-SERH

Features

- Two-Part, Female Through-Hole. The cable can be fixed on the PCB board with the Base-Part.
- Fixing of large heavy components

Drawings

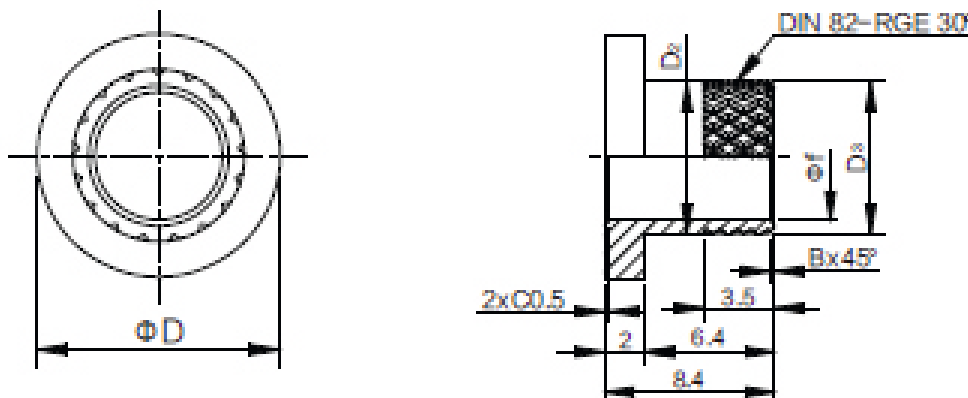

Technical Data

PROPERTIES	
Material	CuZn39Pb3
Surface	Tin
Rate Current	up to 300A
Heat Resistance	-55 C up to +150 C

Drawing No.	$\phi 3,2$	D	D2-0,2	D3 $\pm 0,05$	B
PFPE1501	$\phi 3,2$	8	5,65	5,65	0,5
PFPE1502	$\phi 4,2$	8	5,65	5,65	0,5
PFPE1503	$\phi 5,2$	12	7,45	7,45	0,5
PFPE1504	$\phi 6,2$	12	7,45	7,45	0,3
PFPE1505	$\phi 8,2$	15	9,95	9,95	0,5
PFPE1506	$\phi 8,2$	15	10,65	10,65	0,5