


PCB Connectors PRESS-FIT

Serie THR-IHT

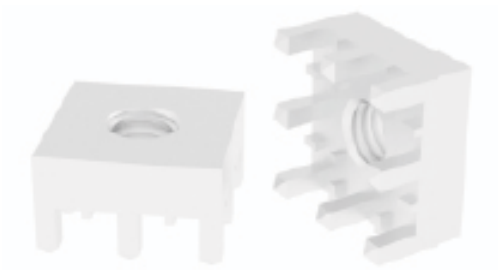


THR-IHT

Features

- Solderable high current Wire-to-Board connections with a focus on automated assembly
- PCB connection for fixing cable lugs
- Cable or PCB angle assembly

Drawings

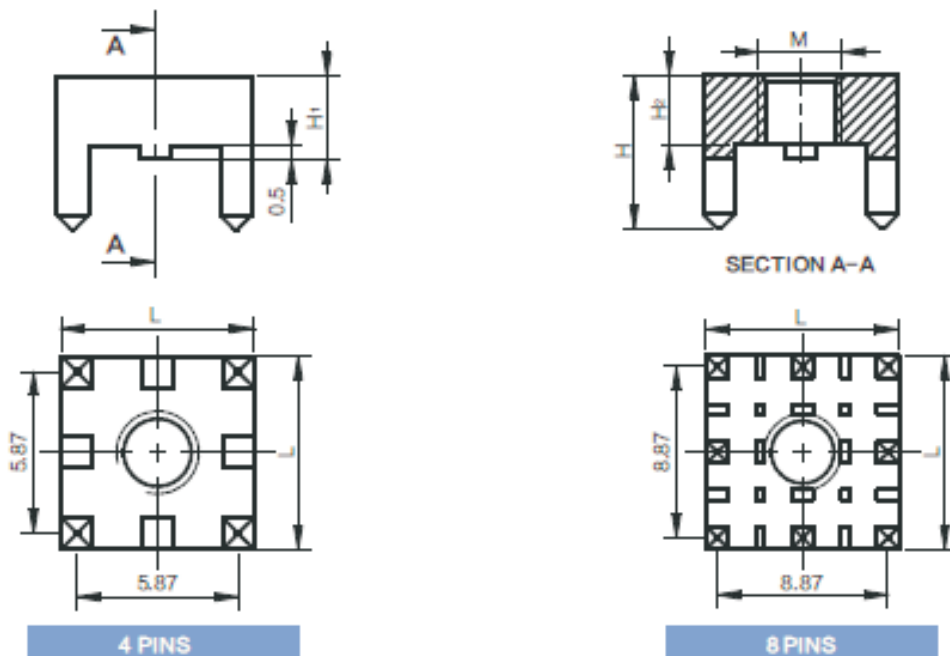

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin
Solder Cream Thickness	150µm
Heat Resistance	-55 C up to +150 C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	H2	L	Pins	IR(A)	Tightening Torque
PFPE1901	M3	5,5	3	2,5	7	4	50	0,5Nm
PFPE1902	M4	5,5	3	2,5	7	4	50	1,2Nm
PFPE1903	M4	6	3,5	3	10	8	85	1,2nm
PFPE1904	M5	6,5	4	3,5	10	8	85	2,2Nm