

PCB Connectors PRESS-FIT

Serie SMD-IBTP




**SMD-IBTP**

Features

- For soldering in SMT, Blistered for fully automated assembly.
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

Drawings

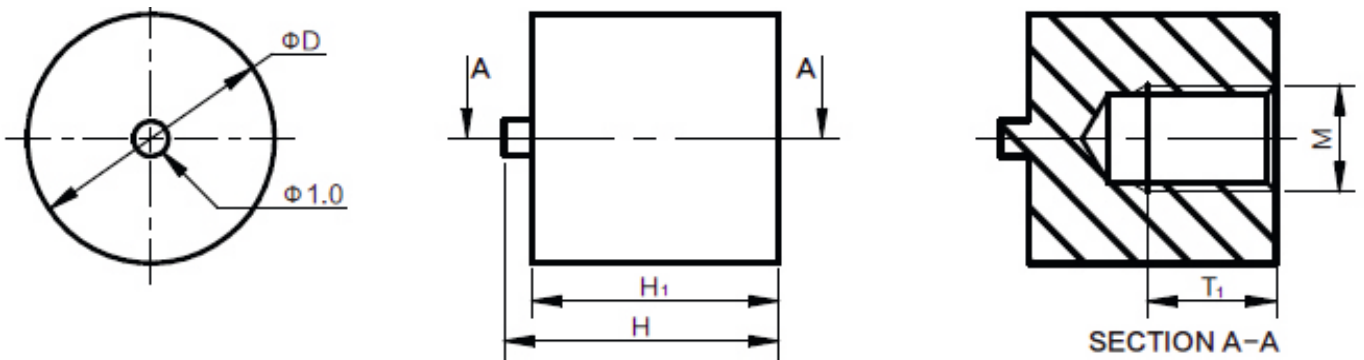

Technical Data

**Technical Data**

PROPERTIES	
Material	Brass
Surface	Tin
Solder Cream Thickness	150 $\mu$ m
Heat Resistance	-55 C up to +150 C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	T1	$\phi D$	IR(A)	Tightening Torque
PFPE2501	M3	7,8	7	4	$\phi 7$	50	0,5Nm
PFPE2502	M4	7,8	7	4	$\phi 7$	50	1,2Nm
PFPE2503	M5	7,8	7	4	$\phi 9$	70	2,2Nm