






SMD-IBT

Features

- For soldering in SMT, Blistered for fully automated assembly.
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

Drawings

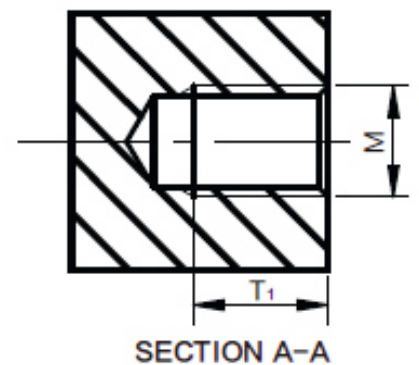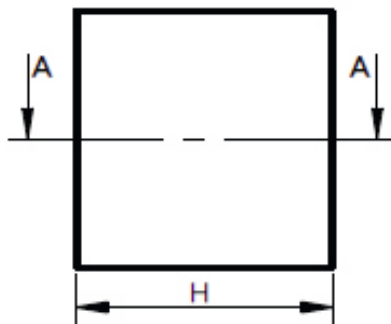

Technical Data

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin
Solder Cream Thickness	150 μ m
Heat Resistance	-55 C up to +150 C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	T1	ϕ D	IR(A)	Tightening Torque
PFPE2401	M3	7	4	$\phi 7$	50	0,5Nm
PFPE2402	M4	7	4	$\phi 7$	50	1,2Nm
PFPE2403	M5	7	4	$\phi 9$	70	2,2Nm