

PCB Connectors PRESS-FIT

Serie SMD-FTT





SMD-FTT

Features

- For soldering in SMT, Blistered for fully automated assembly.
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

Drawings

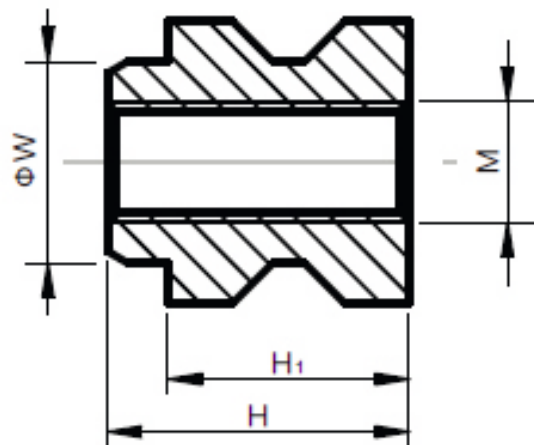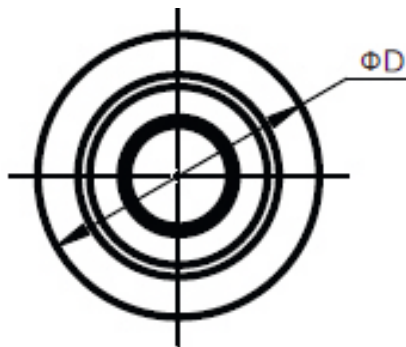

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin
Solder Cream Thickness	150 μ m
Heat Resistance	-55 C up to +150 C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	T1	ϕD
PFPE2901	M3	7,5	6	$\phi 7$	$\phi 5$
PFPE2902	M4	8,5	7	$\phi 9$	$\phi 6$
PFPE2903	M5	8,5	7	$\phi 9$	$\phi 6$
PFPE2904	M6	13	11,5	$\phi 13$	$\phi 9$
PFPE2905	M8	15	13,5	$\phi 13$	$\phi 10$
PFPE2906	M10	19	17,5	$\phi 16$	$\phi 12$