


PCB Connectors PRESS-FIT

Serie THR-IBT

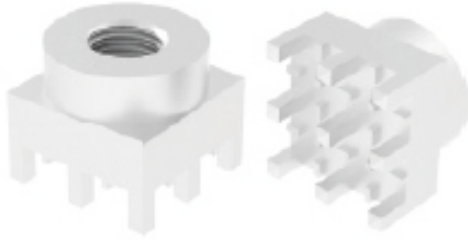


**THR-IBT**

Features

- Solderable high current Wire-to-Board connections with a focus on automated assembly
- PCB connection for fixing cable lugs
- Cable or PCB angle assembly

Drawings

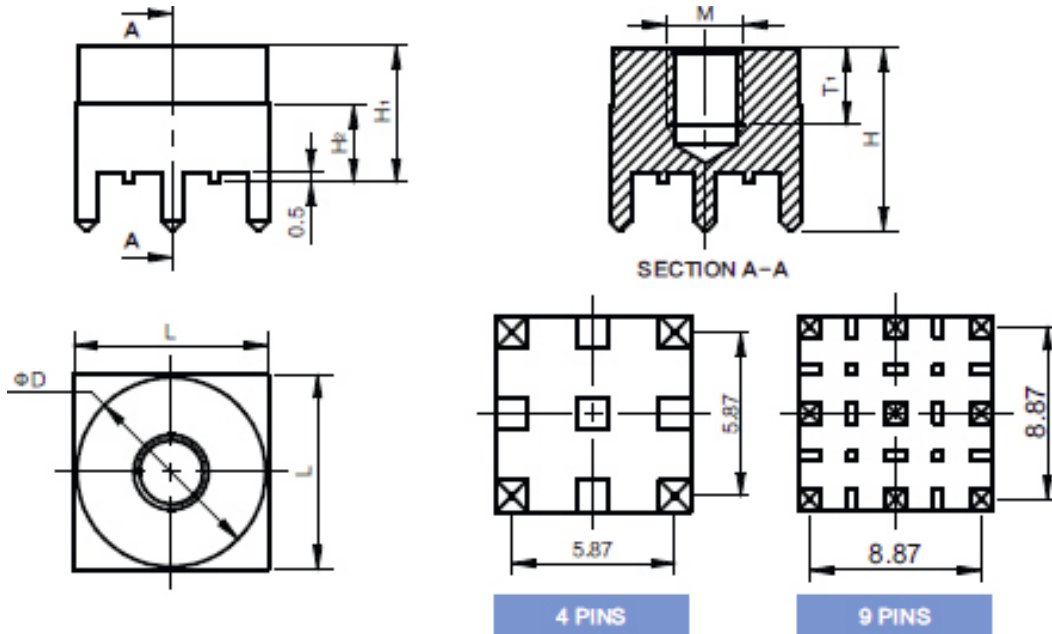

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin
Solder Cream Thickness	150 µm
Heat Resistance	-55 C up to +150 C
Packaging	Bulk; Tape and Reel

Drawing No.	M	T1	H	H1	H2	Ød	L	Pins	IR(A)	TIGHTENING TORQUE
PFPE2001	M3	3,5	8,5	6	4	ø6,6	7	4	50	0,5Nm
PFPE2002	M4	4	9	6,5	4	ø6,6	7	4	50	1,2Nm
PFPE2003	M4	4	9,5	7	4	ø9,7	10	9	85	1,2Nm
PFPE2004	M5	4	9,5	7	4	ø9,7	10	9	85	2,2Nm