

II. Schottky Rectifier

0.5A Surface Mount Schottky Rectifier B0520WS~B0540WS


(Package: SOD-323)

FEATURES

- Low forward voltage drop
- Guard ring construction for transient protection
- High conductance

MECHANICAL DATA

- Case : Molded plastic body
- Terminals : Plated leads solderable per MIL-STD-750, Method 2026
- Polarity : Polarity symbols marked on case
- Marking : B0520WS : SD
B0530WS : SE
B0540WS : SF

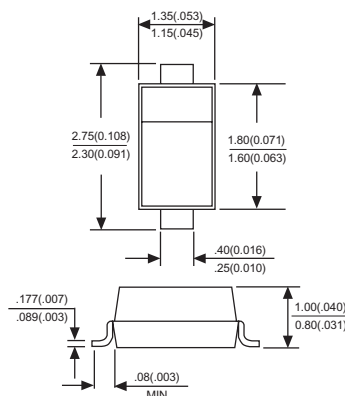

Case: SOD-323
Dimensions in millimeters (inches)

Ratings & Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristic		Symbol	B0520WS	B0530WS	B0540WS	Unit
Peak repetitive peak reverse voltage		V_{RRM}				Volts
Working peak reverse voltage		V_{RWM}	20	30	40	
DC blocking voltage		V_R				
RMS reverse voltage		$V_{R(RMS)}$	14	21	28	Volts
Voltage rate of change		dv/dt	1000			V/ μ s
Minimum reverse breakdown voltage		V_{BR}	$I_R=250\mu A$ -	-	-	Volts
			$I_R=130\mu A$ -	30	-	
			$I_R=20\mu A$ -	-	40	
Forward voltage	Ta=25	$I_F=0.1A$	0.300	0.375	-	Volts
		$I_F=0.5A$	0.385	0.430	0.510	
		$I_F=1.0A$	-	-	0.620	
Reverse current	Ta=25	$V_R=10V$	75	-	-	μA
		$V_R=15V$	-	80	-	
		$V_R=20V$	250	100	10	
		$V_R=30V$	-	500	-	
		$V_R=40V$	-	-	20	
Average rectified output current		I_O	500			mA
Peak forward surge current		I_{FSM}	5.5			Amps
Power dissipation		PD	200			mW
Thermal resistance junction to ambient		Rth-JA	625			/W
Storage temperature		Tstg	-65 to +150			
Capacitance between terminals	$V_R=1V, f=1.0MHz$	C_T	170	170	170	PF

Note:

Maximum ratings and electrical characteristics, single diode @ Ta = 25

<http://patron-components.com/>

Ratings and Characteristic Curves of B0520WS~B0540WS

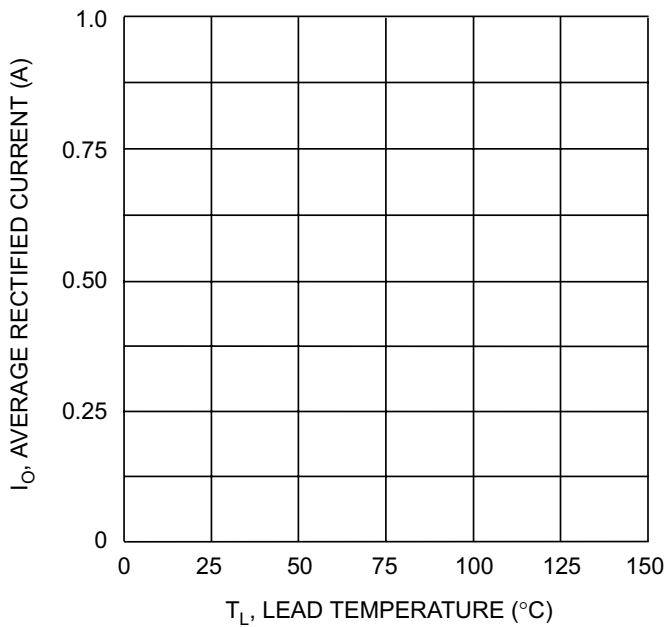


Fig. 1 Forward Current Derating Curve

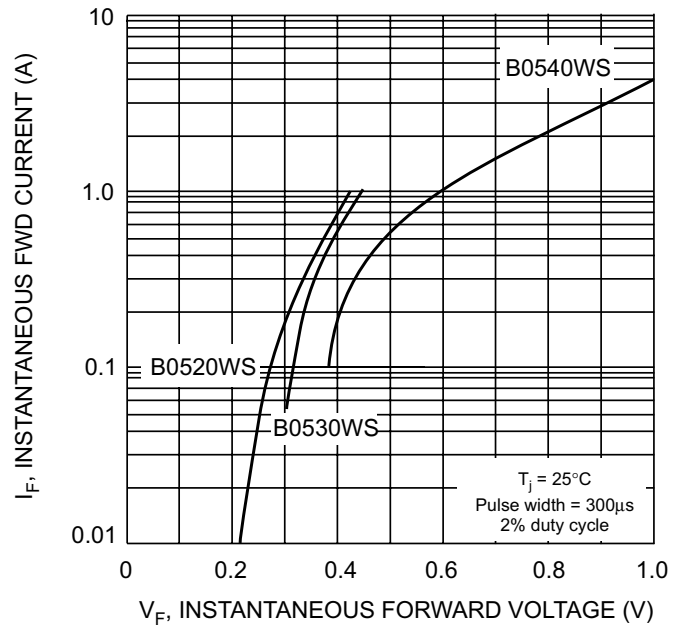


Fig. 2 Typical Forward Characteristics

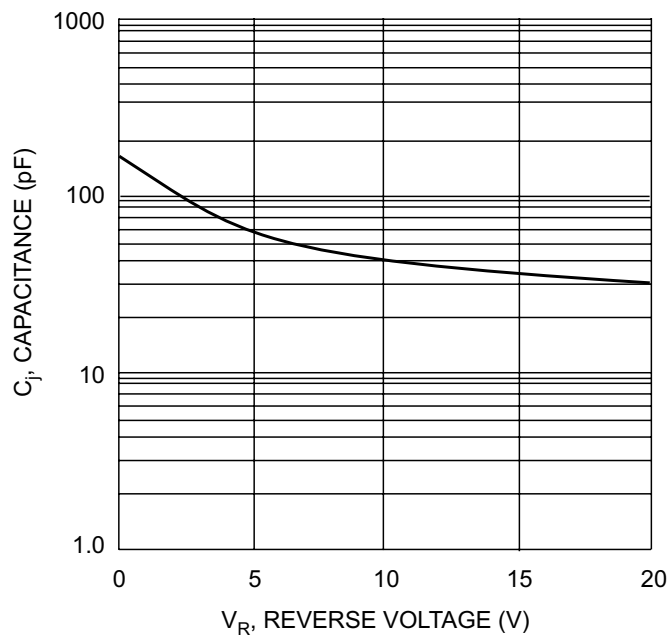


Fig. 3 Typ. Junction Capacitance vs Reverse Voltage