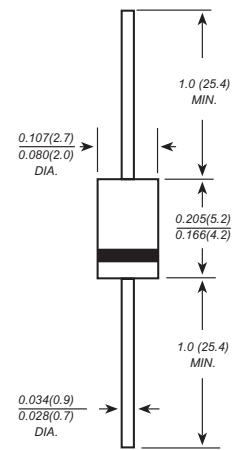


### III. Fast / Ultra Fast / Super Fast Recovery Rectifier

#### 1.0A Super Fast Recovery Rectifier SF11~SF19

(Package: DO-41)

<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>• The plastic package carries Underwriters Laboratory Flammability Classification 94V-0</li> <li>• Super fast switching for high efficiency</li> <li>• Low reverse leakage</li> <li>• High forward surge current capability</li> <li>• High temperature soldering guaranteed: 250 /10 seconds, 0.375"(9.5mm) lead length, 5 lbs. (2.3 kg) tension</li> </ul> <p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li>• Case : JEDEC DO-41 molded plastic body</li> <li>• Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026</li> <li>• Polarity : Color band denotes cathode end</li> <li>• Mounting Position : Any</li> <li>• Weight : 0.012 ounce, 0.33 grams</li> </ul>	 <p>Case: DO-41 Dimensions in inches and (millimeters)</p>
--	--

#### Ratings & Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristics	Symbol	SF11	SF12	SF13	SF14	SF15	SF16	SF18	SF19	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	800	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	560	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	800	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length at $T_a = 55$	$I_o$	1.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30.0								Amps
Maximum instantaneous forward voltage at 1.0 A	$V_F$	0.95			1.30		1.70			Volts
Maximum DC reverse current $T_a = 25$ at rated DC blocking voltage $T_a = 100$	$I_R$	5.0 50.0								$\mu A$
Maximum reverse recovery time (Note 1)	$T_{rr}$	35						60		ns
Typical junction capacitance (Note 2)	$C_j$	15.0				10.0				PF
Typical thermal resistance (Note 3)	$R_{th-JA}$	60.0								/W
Operating Junction and storage temperature range	$T_j, T_{stg}$	-65 to +150								

Notes:

1. Reverse recovery test conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$

2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts D.C.

3. Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length, P.C.B. mounted.

# Ratings and Characteristic Curves of SF11~SF19

