

## VI. Bridge Rectifier

### 2.0A SMD Glass Passivated Bridge Rectifier (Low Profile Type) DF2005SL~DF210SL (Package: DFS)

<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>• Glass passivated die construction</li> <li>• Reliable low cost construction utilizing molded plastic technique</li> <li>• High surge current capability</li> <li>• Small size, simple installation</li> <li>• Plastic material – UL Recognition Flammability Classification 94V-0</li> </ul> <p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li>• Case : Molded plastic</li> <li>• Terminals : Plated terminals</li> <li>• Polarity : Polarity symbols marked on body</li> <li>• Mounting position : Any</li> <li>• Handling precaution : None</li> <li>• Weight : 0.38 grams</li> </ul>	<p>Case: DFS Dimensions in inches and (millimeters)</p>
--	---

### Ratings & Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristics	Symbol	DF 2005SL	DF 201SL	DF 202SL	DF 204SL	DF 206SL	DF 208SL	DF 210SL	Units
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current at $T_a = 40$	$I_o$	2.0							Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method)	$I_{FSM}$	60.0							Amps
Maximum instantaneous forward voltage drop per element at 2.0A	$V_F$	1.1							Volts
Maximum DC reverse current $T_j = 25$ at rated DC blocking voltage $T_j = 125$	$I_R$	10 500							$\mu A$
$I^2t$ Rating for Fusing ( $t < 8.3ms$ )	$I^2t$	10.4							$A^2s$
Typical junction capacitance per element (Note 1)	$C_j$	25							PF
Typical thermal resistance (Note 2)	Rth-JA	40							/ W
Operating junction and storage temperature range	$T_j, T_{stg}$	-55 to +150							

Notes:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts D.C.

2. Thermal resistance junction to ambient mounted on PC Board with 13.0 x 13.0 mm copper pads.

# Ratings and Characteristic Curves of DF2005SL~DF210SL

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

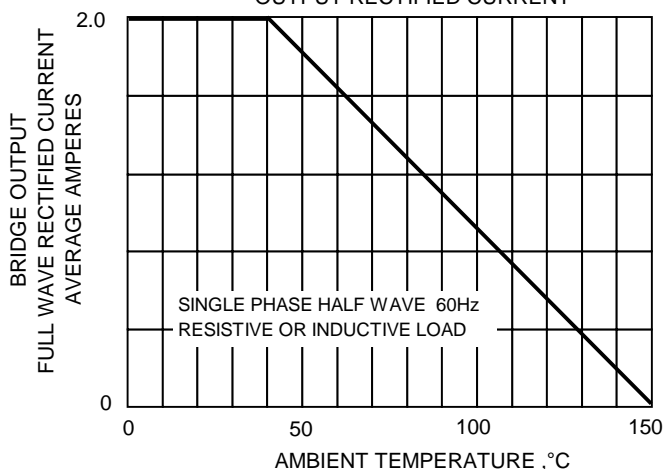


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

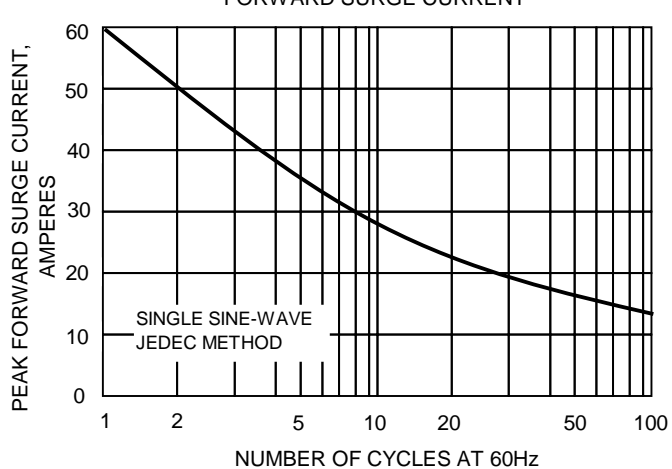


FIG.3-TYPICAL JUNCTION CAPACITANCE

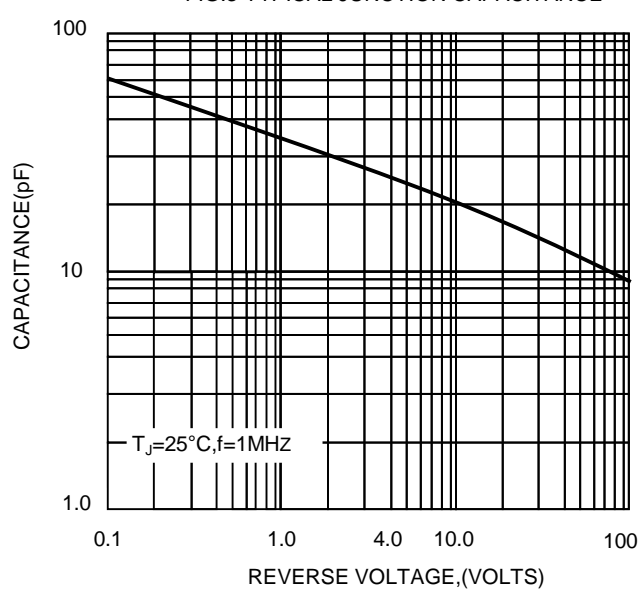


FIG.4-TYPICAL FORWARD CHARACTERISTICS

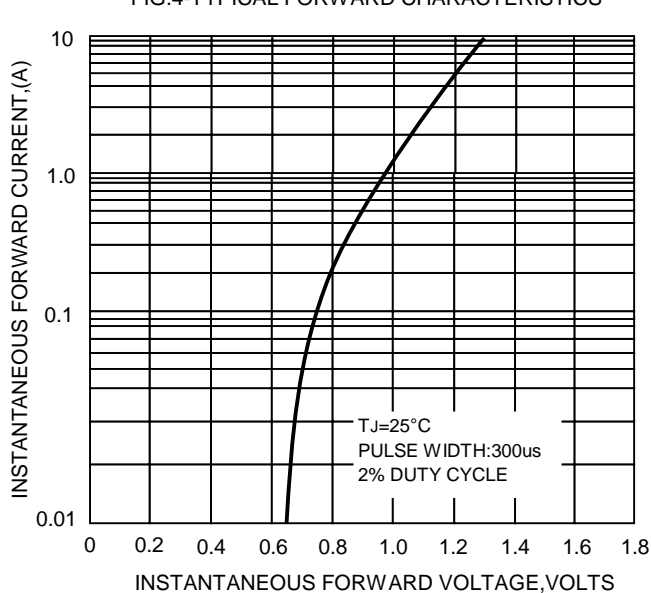


FIG.5-TYPICAL REVERSE CHARACTERISTICS

