

PCB Connectors PRESS-FIT

Serie SMD-FT




SMD-FT

Features

- For soldering in SMT, Blistered for fully automated assembly.
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

Drawings

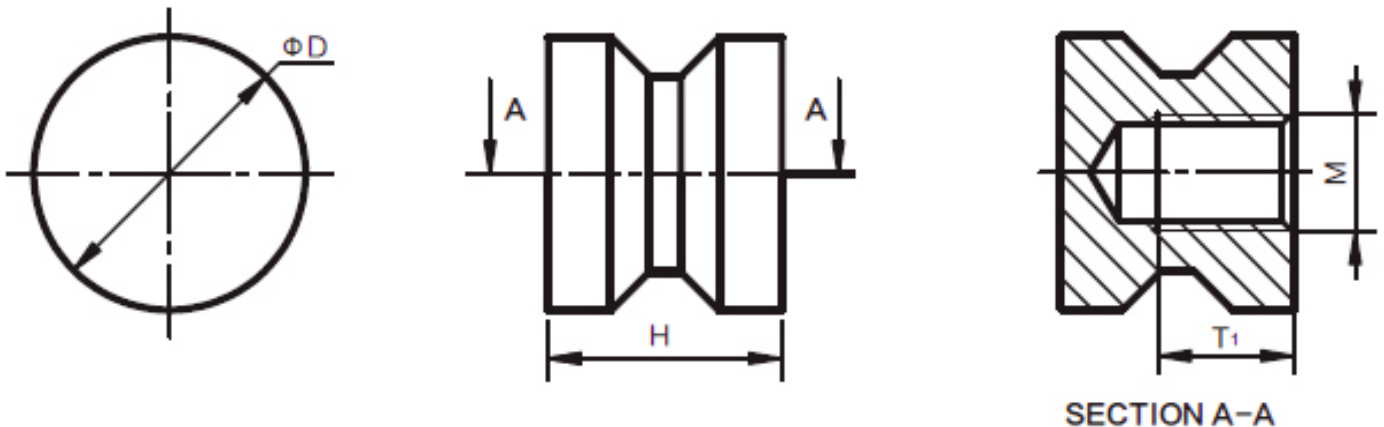

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin
Solder Cream Thickness	150 µm
Heat Resistance	-55 C up to +150 C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	T1	ø D
PFPE2601	M3	6	3,5	ø7
PFPE2602	M4	7	4	ø9
PFPE2603	M5	7	4	ø9
PFPE2604	M6	11,5	6,5	ø13
PFPE2605	M8	13,5	8	ø13
PFPE2606	M10	17,5	11	ø16