



DESCRIPTION:

24-25.2W Wide input AC/DC switching power supply

The rated output power of PPC/PD-25-XS series is 24-25.2W, input voltage range 88-264VAC, output voltage : 5V, 12V, 24V. High reliability, precision, efficiency, ultra-small size, with short circuit, overload, internal thermal protection, widely used in telecommunications, industrial control, instrument, data acquisition, signal control, New Energy, Security, and other electronic systems.

FEATURES

AC input 88VAC-264VAC	100% full load burn-in test	short circuit, overload, over-voltage protection
Operating temperature -20°C~70°C	RoHS complaint	Low standby power consumption <1W
All using 105°C long-life electrolytic capacitors	High reliability, efficiency, long life-time	Miniature size

SELECTION GUIDE

Part Number	Input		Output					Efficiency @25°C, (Typ) %
	Voltage (VAC)		Voltage (VDC)	Pre-set voltage @25°C (V)	Rated current (A)	Current range (A)	Rated power (W)	
	Rated	Range values						
PPC/PD-25-5S	220	88-264	5	5.00-5.05	5.0	0-5.0	25	>77
PPC/PD-25-12S	220	88-264	12	12.00-12.05	2.1	0-2.1	25.2	82
PPC/PD-25-24S	220	88-264	24	24.00-24.05	1.0	0-1.0	24	82

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

OUTPUT CHARACTERISTICS

Conditions	Conditions	Parameter
Ripple and noise, Ta is ambient, 0 < Ta ≤ 70°C	5V output voltage	≤ 80mVp-p
	12V output voltage	≤ 120mVp-p
	24V output voltage	≤ 120mVp-p
Ripple and noise, Ta is ambient, -20 < Ta ≤ 0°C	5V output voltage	≤ 80 mVp-p
	12V output voltage	≤ 120mVp-p
	24V output voltage	≤ 120mVp-p
Dynamic load characteristics, -20 < Ta ≤ 70°C	5V output voltage	0.5A-5A: <±400mv 0.5A~2.5A: <±200mv 2.5A~5A: <±200mV
	12V output voltage	0.21A-2.1A: <±400mv 0.21A~1.05A: <±200mv 1.05A~2.1A: <±200mV
	24V output voltage	0.1A-1A: <±400mv 0.1A~0.5A: <±200mv 0.5A~1A: <±200mV
Output adjustment range @25°C	5V output voltage	4.75V-5.5V
	12V output voltage	11.4V-12.6V
	24V output voltage	22.8V-26.4V

OUTPUT CHARACTERISTICS

Voltage regulation accuracy @-20~70°C	±2%
Line regulation @-20~70°C	±1%
Load regulation @-20~70°C	±2%
Temp. coefficient @-20~70°C	±0.03%/°C
Set-up time @25°C	≤ 1S /230Vac full load ≤ 2S /120Vac full load
Hold-up time @25°C	≥ 10mS (120Vac input, Full load) ≥ 20mS (230Vac input, Full load)
Overshoot & Undershoot @-20~70°C	< 5.0%

INPUT CHARACTERISTICS

Conditions	Parameter
Input voltage range	88Vac~264Vac
Leakage Current	Input—output:<0.25mA Input—PG:<0.75mA
Rated input voltage range	100Vac~240Vac
Frequency Range	47Hz~63Hz
Set-up voltage@-20~70°C	88Vac (refer to the derating curve)
Input current@25°C	<0.7A
Inrush current @25°C	<20A@120Vac Cold start <40A@230Vac Cold start
Standby power@25°C	<1W

PROTECTION @-20~70°C

Conditions	Parameter	Notes
Over-power (5Voutput)	26.25W~37.5W	hiccup mode, auto recovery
Over-power (12Voutput)	26.25W~37.8W	
Over-power (24Voutput)	25.2W~36W	
Over-voltage (5Voutput)	5.25V~7.5V	hiccup mode, auto recovery
Over-voltage (12Voutput)	12.6V~18V	
Over-voltage (24Voutput)	25.2V~36V	
Over-current (5Voutput)	5.25A~7.5A	hiccup mode, auto recovery
Over-current (12Voutput)	2.2A~3.15A	
Over-current (24Voutput)	1.05A~1.5A	
Output short circuit protection	Long-term mode, Auto recovery	

ENVIRONMENT CHARACTERISTICS

Conditions	Parameter
Operating amb. Temp.&Humi.	-20°C~70°C; 20%~90%RH No condensing (refer to the derating curve)
Storage Temp. & Humi.	-40°C~85°C; 10%~95%RH No condensing
Vibration	10 ~ 500Hz, 5G 10min./1cycle, period for60min. each along X,Y, Z axes
Pulse	20G/11mS pulse ,3 times at each X,Y,Z axes
Altitude	5000m

SAFETY&EMC STANDARDS @25°C

Conditions	Parameter
Safety Standards	GB4943/EN60950
Withstand Voltage	I/P-O/P:3.0KVac/10mA; I/P-FG:1.5KVac/10mA; O/P-FG:0.5KVdc/10mA test time:1min.
Grounding test	Test condition: 32A / 2min.; Grounding resistance: <0.1 ohms.
Leakage Current	Input—output:<0.25mA Input—PG:<0.75mA
Isolation resistance	I/P-O/P: 10M ohms; I/P-FG : 10M ohms; O/P-FG : 10M ohms
EMC emission	EN55032 EN55024, Class B/FCC Part15 Class B
EMC immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; heavy industry level



OTHERS

Conditions	Parameter
Cooling method	Cooling by free air flow
Dimension (L*W*H)	94*51*29mm
Net Weight	0.17kg

RELIABILITY CHARACTERISTICS

Conditions	Parameter
MTBF	200,000Hrs AT 25°C, MIL-217 Method 2 Components Stress Method

MECHANICAL DIMENSIONS

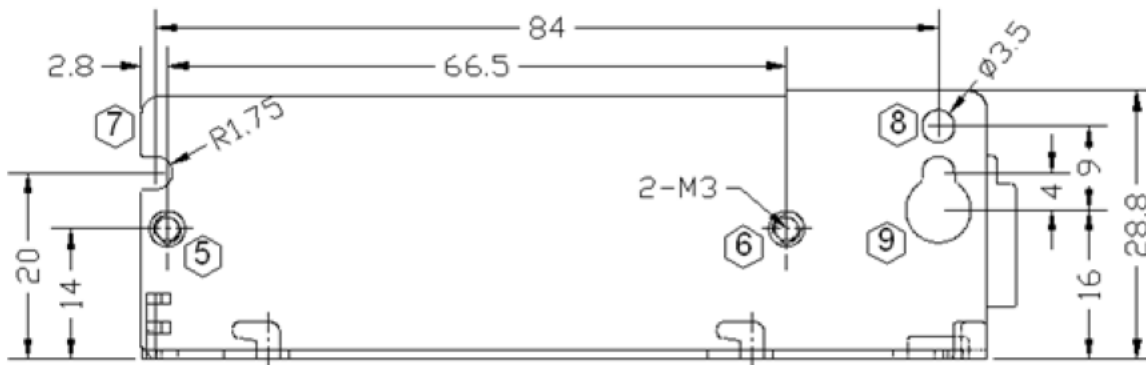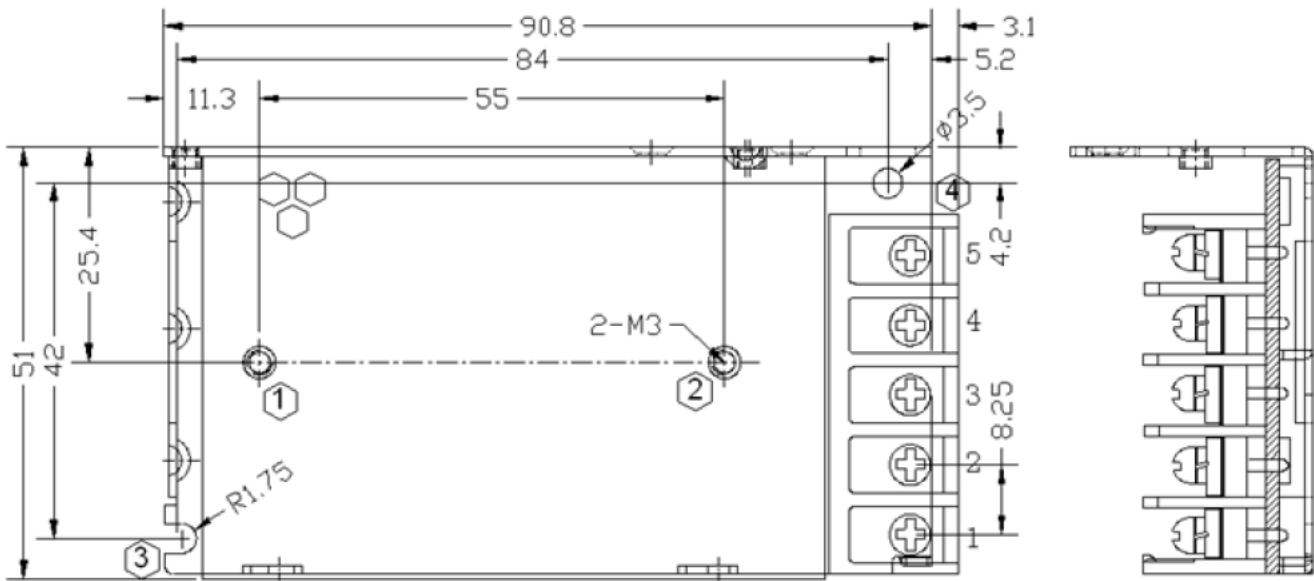

Mounting location	Mounting method	Mounting holes	Screw Spec	Lmax	Torque(max)
Bottom mounting	Fix by Screws	1~2	M3	3mm	6.5Kgf.cm
		3~4	M3	/	
Side mounting	Fix by Screws	5~6	M3	3mm	6.5Kgf.cm
		7~9	M3	/	


1.AC input terminals definition

No.	Function	Wire specs	Torque(max)
1	L	22-14AWG	7.0Kgf.cm
2	N		
3	PE		


2.DC output terminals definition

No.	Function	Wire specs	Torque(max)
4	V-	22-14AWG	7.0Kgf.cm
5	V+		


RECOMMEND CIRCUIT

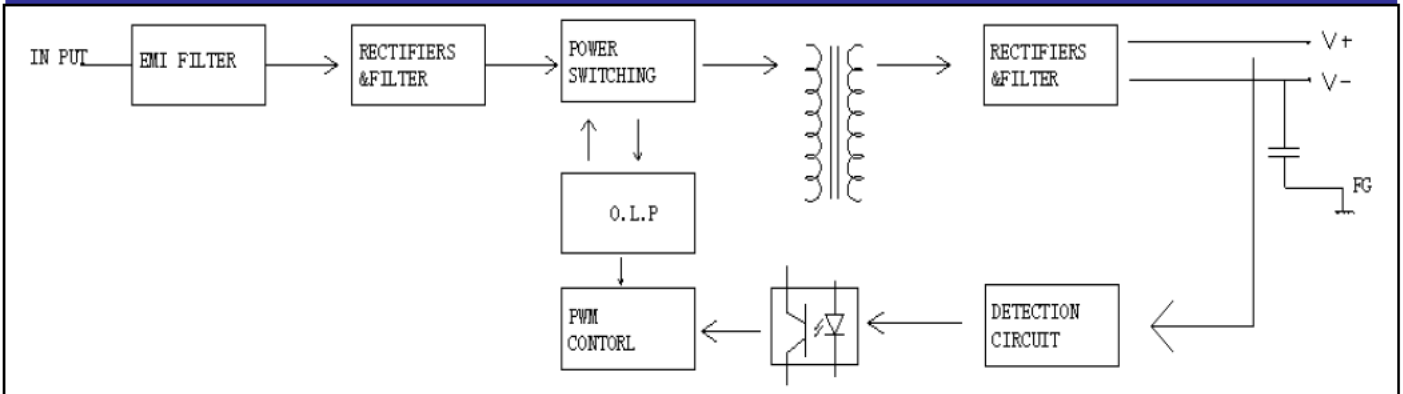

DERATING CURVE

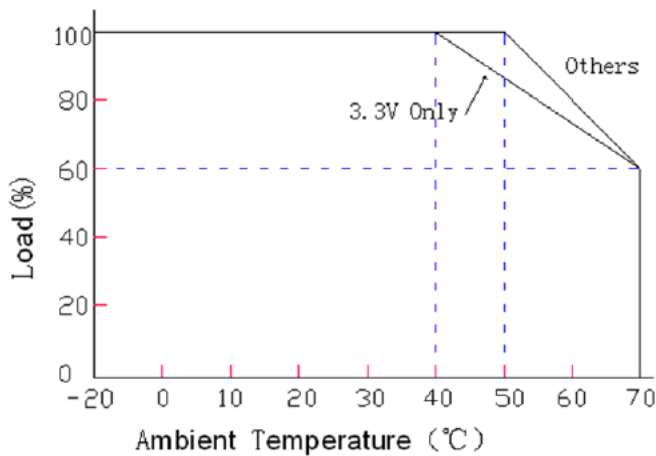

OUTPUT CHARACTERISTICS CURVE

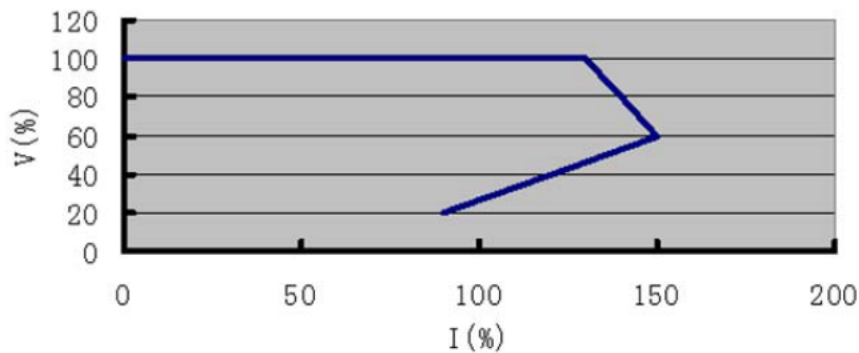

MODEL SELECTION

PP C / PD - 25 - 12 S

