



DESCRIPTION: 1W 1.5KVDC, 3KVDC Isolated Wide Input Single And Dual Output DC/DC Converters

PP2L-1W series are a range of isolated 1 Watt converters in a SIP package, 2:1,4:1 wide input range and tightly regulated output voltage qualifies these converters for many cost critical applications in industrial and consumer electronics.

Operating temperature ranges from -40 °C to 85 °C the Internal SMD construction makes it possible to offer a product with high performance at low cost.

FEATURES

RoHS compliant	2:1,4:1 wide range voltage input	Continuous short circuit protection
Operating temperature: -40°C to 85°C	Low regulation	1.5KVDC, 3KVDC isolation
Efficiency up to 83%	Power density 0.91W/cm ³	Input voltage: 5V, 12V, 24V, 48V
Output voltage: 3.3V,5V, 9V, 12V, 15V,24V / ±5V, ±9V, ±12V, ±15V,±24V	Low ripple noise	External control

SELECTION GUIDE

Part Number	Input			Voltage (VDC)	Output		Efficiency (% Typ.)
	Voltage(VDC)				Current(mA)		
	Nominal	Raneg	Max*		Max.	Min.	
PP2L05D05S-1W	5 (2:1)	4.5-9.0	11	±5	±100	±10	72
PP2L05D09S-1W	5 (2:1)	4.5-9.0	11	±9	±55	±5	72
PP2L05D12S-1W	5 (2:1)	4.5-9.0	11	±12	±42	±4	74
PP2L05D15S-1W	5 (2:1)	4.5-9.0	11	±15	±33	±3	73
PP2L05S05S-1W	5 (2:1)	4.5-9.0	11	5	200	20	70
PP2L05S09S-1W	5 (2:1)	4.5-9.0	11	9	111	11	71
PP2L05S12S-1W	5 (2:1)	4.5-9.0	11	12	83	8	76
PP2L05S15S-1W	5 (2:1)	4.5-9.0	11	15	67	7	75
PP2L05S24S-1W	5 (2:1)	4.5-9.0	11	24	42	4	72
PP2L12D05S-1W	12 (2:1)	9.0-18	22	±5	±100	±10	76
PP2L12D09S-1W	12 (2:1)	9.0-18	22	±9	±55	±5	76
PP2L12D12S-1W	12 (2:1)	9.0-18	22	±12	±42	±4	74
PP2L12D15S-1W	12 (2:1)	9.0-18	22	±15	±33	±3	75
PP2L12D24S-1W	12 (2:1)	9.0-18	22	±24	±21	±2	73
PP2L12S03S-1W	12 (2:1)	9.0-18	22	3.3	303	30	74
PP2L12S05S-1W	12 (2:1)	9.0-18	22	5	200	20	76
PP2L12S09S-1W	12 (2:1)	9.0-18	22	9	111	11	78
PP2L12S12S-1W	12 (2:1)	9.0-18	22	12	83	8	79
PP2L12S15S-1W	12 (2:1)	9.0-18	22	15	67	7	80
PP2L12S24S-1W	12 (2:1)	9.0-18	22	24	42	4	72
PP2L24D05S-1W	24 (2:1)	18-36	40	±5	±100	±10	78
PP2L24D09S-1W	24 (2:1)	18-36	40	±9	±55	±5	76
PP2L24D12S-1W	24 (2:1)	18-36	40	±12	±42	±4	78
PP2L24D15S-1W	24 (2:1)	18-36	40	±15	±33	±3	76
PP2L24S03S-1W	24 (2:1)	18-36	40	3.3	303	30	72
PP2L24S05S-1W	24 (2:1)	18-36	40	5	200	20	76
PP2L24S09S-1W	24 (2:1)	18-36	40	9	111	11	78
PP2L24S12S-1W	24 (2:1)	18-36	40	12	83	8	80
PP2L24S15S-1W	24 (2:1)	18-36	40	15	67	7	80
PP2L24S24S-1W	24 (2:1)	18-36	40	24	42	4	77
PP2L48D05S-1W	48 (2:1)	36-72	80	±5	±100	±10	76
PP2L48D12S-1W	48 (2:1)	36-72	80	±12	±42	±4	77
PP2L48D15S-1W	48 (2:1)	36-72	80	±15	±33	±3	75
PP2L48S05S-1W	48 (2:1)	36-72	80	5	200	20	76
PP2L48S09S-1W	48 (2:1)	36-72	80	9	111	11	78
PP2L48S12S-1W	48 (2:1)	36-72	80	12	83	8	80
PP2L48S15S-1W	48 (2:1)	36-72	80	15	67	7	80
PP2L24S05SW-1W	24 (4:1)	9-36	40	5	200	20	76
PP2L48S05SW-1W	48 (4:1)	18-72	80	5	200	20	76

3KVDC isolation with /3H at the end of the part number. for example PP2L24S05S-1W/3H.

COMMON SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-50		125	°C
Temp.Rise at full loat			185	35	°C
Lead temperature	1.5mm from case for 10 seconds			300	°C
No-load power consumption			120		mW
Cooling	Free Air Convection				
Short circuit protection	Continuous automatic recovery				
Case material	Plastic (UL94-V0)				
MTBF		1000			K hours
Weight			5		g

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1minute and 1mA max	1500, 3000			VDC
Isolation resistance	Test at 500 VDC	1			GΩ
Isolation capacitance	Input/Output, 100KHZ/1V		35		

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Units
Output power	Refer to product program	0.1		1	W
Output voltage accuracy	Refer to recommended circuit		±1	±3	%
Load regulation	10% to 100% load (PP2L-D-1W)		±0.5	±0.75	%
Load regulation	10% to 100% load (PP2L-S-1W)		±0.5	±1.0	%
Line regulation	Input Voltage from low to high		±0.2	±0.5	%
Temperature drift (Vout)	Refer to recommended circuit			±0.03	%/°C
Ripple & Noise	20MHZ Bandwidth		25	75	mVp-p
Switching frequency	100% load ,input voltage range		300		KHZ

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

APPLICATION NOTES


External capacitance

These converters will work without external capacitors, in order to guarantee the full parametric performance over the full line and load range we recommended you to use the value we listed at right side. All parts have been tested and characterized using the following values and test circuit.


External Capacitor Table			
Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
3.3	1000	±5	330
5	680	±9	330
9	560	±12	220
12	470	±15	150
15	330	±24	100
24	220	-	-

RECOMMENDED CIRCUIT

Single Output

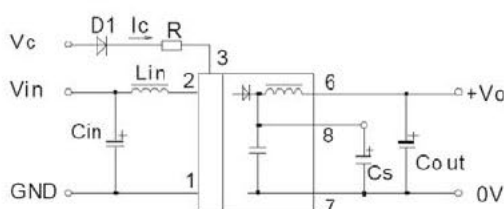


Dual Output

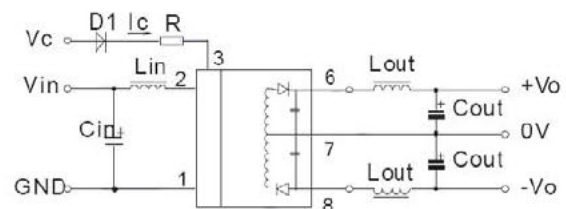

SOLDERING INFORMATION


This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The series is backward compatible with Sn/Pb soldering systems.

TEMPERATURE DERATING GRAPHS

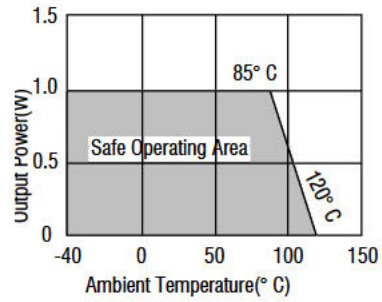

MECHANICAL DIMENSIONS

SIP Package

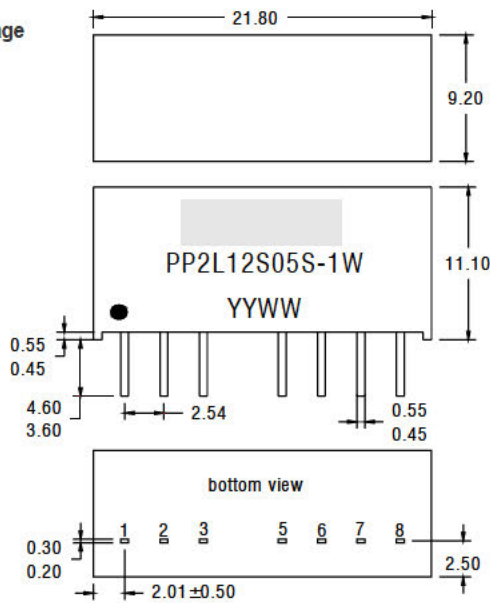

Weight: 5.0g


All dimensions in mm±0.25mm. All pins on a 2.54mm pitch and within±0.25mm of true position.

PIN CONNECTIONS

8 PIN SIP		
Pin	Single Output	Dual Output
1	GND	GND
2	Vin	Vin
3	CTRL	CTRL
5 *	NC	NC
6	+V0	+V0
7	0V	0V
8	CS	-V0


*This pin must have no external connection.

RECOMMENDED FOOTPRINT DETAILS

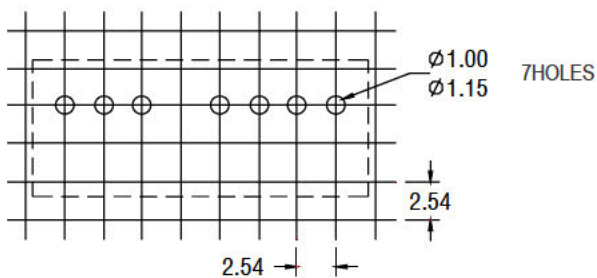

Unless otherwise stated all dimensions in mm ±0.5mm.

TUBE OUTLINE DIMENSIONS

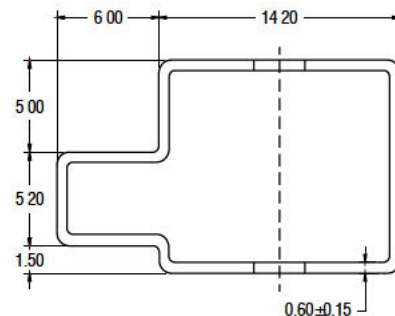

All dimensions in mm ±0.5mm.

Tube length : 520mm ±2mm . Tube Quantity: 23PCS