



DESCRIPTION: 15W 1.5KVDC Isolated Wide Voltage Input DC/DC Converters

The rated output power of PP15DD converters is 15W, the outline dimensions is 50.8*40.6*11.2, 2:1 and 4:1 wide input voltage range, the voltage range is 9V-18V, 18V-36V, 36V-72V, 9V-36V and 18V-72VDC. The accuracy of the converter can reach $\pm 1\%$, it can be widely used in telecommunications, railway transportation, instrument and etc.

FEATURES

15W output power	2:1&4:1 wide input voltage range	Under input voltage protection
50.8mm*40.6mm*11.2mm standard package	Fixed switching frequency	RoHS compliant
Operating temperature -40°C to 85°C	Long-term short circuit protection	Good capability of capacity load
Metal shielding package	1.5KVDC isolation	/

SELECTION GUIDE

Part Number	Input Voltage		Output		Efficiency(Typ) %	
	voltage (VDC)		Voltage (VDC)	Current (A)		
	Rated	Range values				
PP15DD12S03	12(2:1)	9-18	3.3	4	80	
PP15DD12S05	12(2:1)	9-18	5	3	82	
PP15DD12S12	12(2:1)	9-18	12	1.25	82	
PP15DD12S15	12(2:1)	9-18	15	1	84	
PP15DD12S24	12(2:1)	9-18	24	0.63	84	
PP15DD12D05	12(2:1)	9-18	± 5	± 1.5	80	
PP15DD12D12	12(2:1)	9-18	± 12	± 0.63	83	
PP15DD12D15	12(2:1)	9-18	± 15	± 0.5	85	
PP15DD24S03	24(2:1)	18-36	3.3	4	80	
PP15DD24S05	24(2:1)	18-36	5	3	83	
PP15DD24S12	24(2:1)	18-36	12	1.25	85	
PP15DD24S15	24(2:1)	18-36	15	1	85	
PP15DD24S24	24(2:1)	18-36	24	0.63	85	
PP15DD24D05	24(2:1)	18-36	± 5	± 1.5	83	
PP15DD24D12	24(2:1)	18-36	± 12	± 0.63	85	
PP15DD24D15	24(2:1)	18-36	± 15	± 0.5	85	
PP15DD48S03	48(2:1)	36-72	3.3	4	80	
PP15DD48S05	48(2:1)	36-72	5	3	83	
PP15DD48S12	48(2:1)	36-72	12	1.25	85	
PP15DD48S15	48(2:1)	36-72	15	1	85	
PP15DD48S24	48(2:1)	36-72	24	0.63	85	
PP15DD48D05	48(2:1)	36-72	± 5	± 1.5	83	
PP15DD48D12	48(2:1)	36-72	± 12	± 0.63	85	
PP15DD48D15	48(2:1)	36-72	± 15	± 0.5	85	
PP15DD24S05W	24(4:1)	9-36	5	3	80	
PP15DD24S12W	24(4:1)	9-36	12	1.25	82	
PP15DD24S15W	24(4:1)	9-36	15	1	83	
PP15DD24S24W	24(4:1)	9-36	24	0.63	84	
PP15DD24D05W	24(4:1)	9-36	± 5	± 1.5	81	
PP15DD24D12W	24(4:1)	9-36	± 12	± 0.63	83	
PP15DD24D15W	24(4:1)	9-36	± 15	± 0.5	84	
PP15DD48S05W	48(4:1)	18-72	5	3	80	
PP15DD48S12W	48(4:1)	18-72	12	1.25	82	
PP15DD48S15W	48(4:1)	18-72	15	1	83	
PP15DD48S24W	48(4:1)	18-72	24	0.63	85	
PP15DD48D05W	48(4:1)	18-72	± 5	± 1.5	81	
PP15DD48D12W	48(4:1)	18-72	± 12	± 0.63	83	
PP15DD48D15W	48(4:1)	18-72	± 15	± 0.5	84	


Input voltage 9-18VDC, start-up voltage 9.5-18VDC , input voltage 9-36VDC ,start-up voltage 9.5-36VDC.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

GENERAL CHARACTERISTICS									
parameter	Test conditions	Min	Typ	Max	Units				
Isolation voltage	Input to output		500	1500	VDC				
Insulation resistance	Input to output	100M			Ohm				
Seismic	10~55Hz		5		G				
MTBF	MIL-HDBK-217F2		5×10^5		hrs				
Over-current protection mode	All input range	Automatic recovery							
Cooling	Free air convection								
Case material	Metal case								
INPUT CHARACTERISTICS									
parameter	Test conditions	Min	Typ	Max	Units				
Input voltage	12V Input module(9V-18V)	9.5	12	18	VDC				
Input voltage	24V Input module(18V-36V)	18	24	36	VDC				
Input voltage	48V Input module(36V-72V)	36	48	72	VDC				
Input voltage	24V Input module(9V-36V)	9.5	24	36	VDC				
Input voltage	48V Input module(18V-72V)	18	48	72	VDC				
Start time	Input rising time from 5%-100%	20			ms				
CTL remote control	CTL remote control add -vin	Turn off							
CTL remote control	CTL remote control pending Level control from 12V-40V	Turn on							
OUTPUT CHARACTERISTICS									
parameter	Test conditions	Min	Typ	Max	Units				
Voltage accuracy	$I_o=0.1 \dots 1.0 \times I_{nom}$ $v_i=v_i$ rated			± 1	%				
Line regulation	$V_{min} < v_i < V_{max}$			± 0.2	%				
Load regulation	$I_o=0.1 \dots 1.0 \times I_{nom}$ $V_{min} < v_i < V_{max}$			± 0.5	%				
Auxiliary voltage accuracy	Main Load and auxiliary load differ 25%, the auxiliary circuit of the load with at least 25%, the main circuit with full load			± 3	%				
Ripple and noise	20MHz bandwidth			± 1	%				
Over current protection	$V_{min} < v_i < V_{max}$	120			%				
output voltage change range	$V_{min} < v_i < V_{max}$			10	%				
Transient recovery time	25% load changes			± 5	%				
Transient overshoot time	25% load changes			400	us				
Switch frequency	$V_{min} < v_i < V_{max}$		300		KHz				
ENVIRONMENT CHARACTERISTICS									
parameter	Test conditions	Min	Typ	Max	Units				
Storage Humidity	Non condensing	5		+95	%				
Operating Temperature	Power derating (above 71°C)	-40		+85	°C				
Storage Temperature		-55		+125	°C				
Max. Case Temperature	Operating Temperature curve range			105	°C				
Lead Temperature	1.5mm from case for 10 seconds			300	°C				
Cooling	Free air convection								


- Module in every environment temperature rating, case temperature under shall not exceed the maximum case temperature level.

MODEL SELECTION

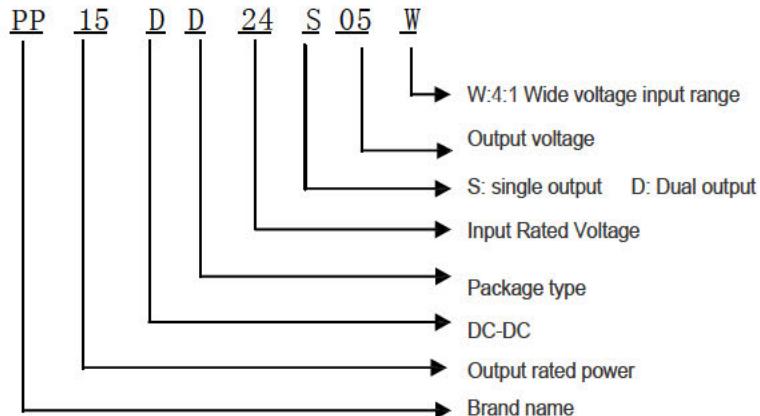


RECOMMEND CIRCUIT

Single Output

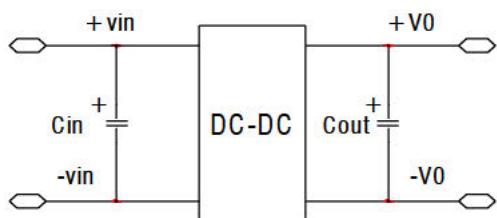


RECOMMEND CIRCUIT

Dual Output

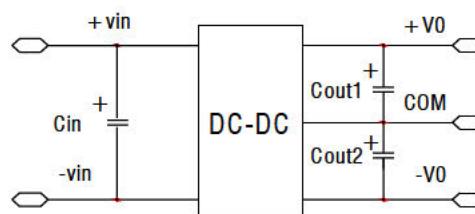

- Add input capacitance C_{in} is helpful to improve the electromagnetic compatibility, recommend C_{in} use 47 uF-100uF of the electrolytic capacitors.
- If the module connect to the digital circuits, please add the C_{out} 、 C_{out1} 、 C_{out2} .
- If C_{out} , C_{out1} , C_{out2} value is too high or lower ESR, it will cause the module unstable,
- The recommended value of C_{out} , C_{out1} , C_{out2} should be 100 uF/A, the current here means the output current.

Trim application&Trim Resistance

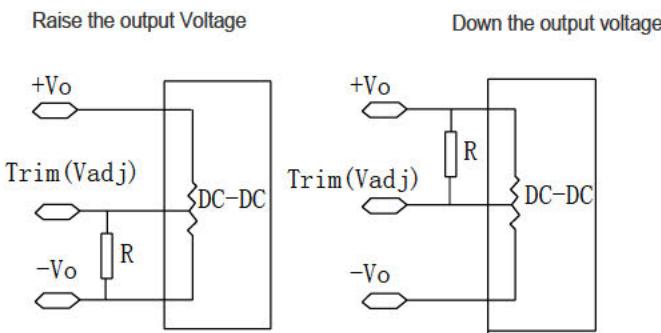

- In dual and triple output modules, this application can just used in the main road (auxiliary road share together with the main road)

USING ATTENTIONS

- Module will cause irreversible damage when in the state of the input reverse polarity.
- Module will cause irreversible damage when in the long-term overload conditions.
- Module will cause irreversible damage when out of the maximum input voltage range.