



DESCRIPTION: 20W 1.5KVDC Wide Voltage Input DC/DC Converters

The rated output power of PP20DB converters is 20W, the outline dimensions is "25.4*25.4*12.7", 4:1 wide input voltage range, the voltage range is 9V-36V, 18-75V. The accuracy of the converter can reach $\pm 1\%$, it can be widely used in telecommunications, railway transportation, instrument and etc.

FEATURES

20W output power	Long-term short-circuit protection, Auto recovery	High switching frequency, High output density
Metal shell package	With remote control and output adjustment function	RoHS compliant

SELECTION GUIDE

Part Number	Input Voltage		Output		Efficiency (Typ) %	Ripple and noise (mV)
	Voltage (VDC)		Voltage (VDC)	Current (A)		
	Rated	Range values				
PP20DB24S05W	24(4:1)	9-36	5.05	4.0	88	100
PP20DB24S12W	24(4:1)	9-36	12	1.67	88	100
PP20DB48S12W	48(4:1)	18-75	12	1.67	88	100

Input voltage 9-18VDC, start-up voltage 9.5-18VDC, input voltage 9-36VDC, start-up voltage 9.5-36VDC.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

INPUT CHARACTERISTICS

Parameter	Conditions	Min	Typ	Max	Units
Input Voltage	24V Input module(9V-36V)	9.5	24	36	VDC
Input Voltage	48V Input module(18V-75V)	18	48	75	VDC
Remote Control	CNT side plus level, the reference voltage is -Vin	High frequency electric or floating, low level or ground power supply work, output power was turned off			

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min	Typ	Max	Units
Voltage accuracy				± 1	%
Voltage regulation				± 10 (VO)	%
Adjustment rate				± 0.2	%
Load effect				± 0.5	%
Dynamic Response	50~75% Load			$\pm 4\%V_o$ Overshoot	%
Dynamic Response	50~25% Load			400 μ S Recovery	%
Temperature drift coefficient			± 0.02		%/°C

GENERAL CHARACTERISTICS

Parameter	Conditions	Min	Typ	Max	Units
Isolation voltage	Input-Output		1500		VDC
Isolation voltage	Input - shell		1500		VDC
Isolation voltage	Output nput - shell		500		VDC
Insulation resistance	500VDC		100		M Ω
Switching frequency			300		KHZ
Environment temperature		-25		+95	°C
Working temperature		-25		+55	°C
Storage temperature		-40		+105	°C
Relative humidity		10		90	%

PROTECTION CHARACTERISTICS


parameter	conditions
Output Over-current protection	Auto recovery
Output Short -circuit protection	Auto recovery

NOTES

- 1、 The maximum temperature can not exceed the specified value While product work.
- 2、 The highest working environment temperature of product is variable, the cooling conditions and the actual use of power changes will affect the product's maximum working temperature.
- 3、 This series of high power density products, more heat dissipation, cooling area is limited; In high temperature environment & full-Load, it is recommended to use auxiliary cooling measures (plus radiator, paste the metal box wall, etc.) to ensure that The temperature of the product substrate does not exceed the specified value.

MECHANICAL DIMENSIONS	PIN CONNECTION														
<p>DIP Package</p> <p style="text-align: center;">bottom view</p> <p>Units: mm Pin diameter tolerances: $\pm 0.1\text{mm}$ General Tolerance: $\pm 0.5\text{mm}$</p>	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #d3d3d3;"> <th>PIN</th> <th>Single output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>CNT</td> </tr> <tr> <td>4</td> <td>+V0</td> </tr> <tr> <td>5</td> <td>TRIM</td> </tr> <tr> <td>6</td> <td>GND</td> </tr> </tbody> </table>	PIN	Single output	1	+Vin	2	-Vin	3	CNT	4	+V0	5	TRIM	6	GND
PIN	Single output														
1	+Vin														
2	-Vin														
3	CNT														
4	+V0														
5	TRIM														
6	GND														

OUTPUT ADJUSTMENT SCHEMATIC DIAGRAM

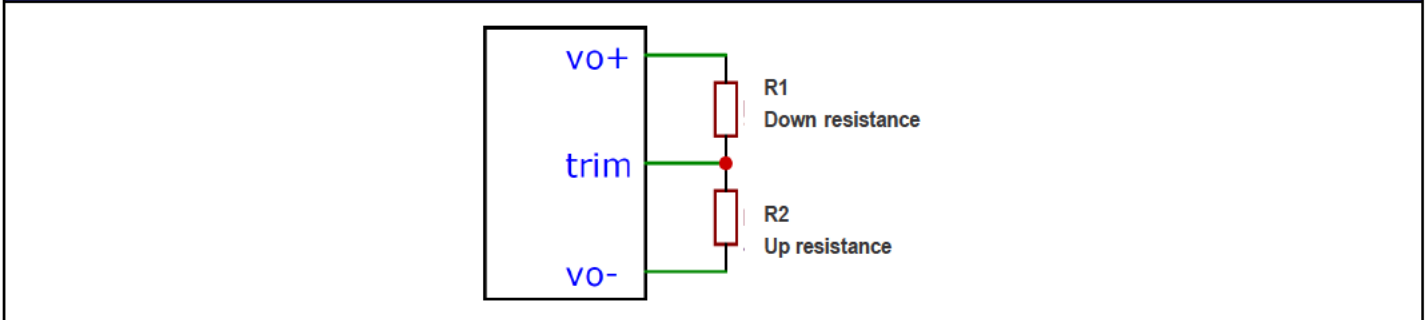

MODEL SELECTION

