

DESCRIPTION: 0.5W 1.5KVDC Isolated Single Output DC/DC Converters

The PPLE-W5 series are miniature, isolated low power and high efficiency DC/DC converters in a SIP and DIP package. They offer the ideal solution in many space critical applications for board level power distribution. The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 1.5KVDC isolation. Operating temperature -40 °C to 105 °C

FEATURES

RoHS compliant, CE certification	Single output rail	1.5KVDC isolation
High efficiency for low power applications	SIP & DIP package styles	Power density 0.36W/cm ³
UL 94V-0 package material	Footprint from 0.69cm ²	Input voltage: 3.3V ,5V , 12V
Output voltage: 3.3V, 5V, 9V, 12V ,15V	Custom solutions available	Operating temperature: -40°C to 105°C

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current (Max./Min)	Efficiency	Package Style
	V	V	mA	%	
PPLE0303D-W5	3.3	3.3	152/15.2	76	DIP
PPLE0305D-W5	3.3	5	100/10	76	DIP
PPLE0503D-W5	5	3.3	152/15.2	76	DIP
PPLE0505D-W5	5	5	100/10	76	DIP
PPLE0509D-W5	5	9	55.5/5.55	77	DIP
PPLE0512D-W5	5	12	41.7/4.17	78	DIP
PPLE0515D-W5	5	15	33.3/3.33	78	DIP
PPLE0303S-W5	3.3	3.3	152/15.2	76	SIP
PPLE0305S-W5	3.3	5	100/10	76	SIP
PPLE0503S-W5	5	3.3	152/15.2	76	SIP
PPLE0505S-W5	5	5	100/10	76	SIP
PPLE0509S-W5	5	9	55.5/5.55	77	SIP
PPLE0512S-W5	5	12	41.7/4.17	78	SIP
PPLE0515S-W5	5	15	33.3/3.33	78	SIP
PPLE1205D-W5	12	5	100/10	76	DIP
PPLE1209D-W5	12	9	55.5/5.55	77	DIP
PPLE1212D-W5	12	12	41.7/4.17	78	DIP
PPLE1215D-W5	12	15	33.3/3.33	78	DIP
PPLE1203S-W5	12	3.3	152/15.2	76	SIP
PPLE1205S-W5	12	5	100/10	76	SIP
PPLE1209S-W5	12	9	55.5/5.55	77	SIP
PPLE1212S-W5	12	12	41.7/4.17	78	SIP
PPLE1215S-W5	12	15	33.3/3.33	78	SIP

Add suffix "P" for continuous short circuit protection, for example PPLE0505SP-W5.

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	3.3V input types	2.9	3.3	3.6	V
Voltage range	5V input types	4.5	5.0	5.5	V
Voltage range	12V input types	11	12	13.3	V

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1 second	1500			VDC
Resistance	Viso=1000VDC	1			GΩ

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage Vin, PPLE03XXX-W5	5.5V
Input voltage Vin, PPLE05XXX-W5	7V
Input voltage Vin, PPLE12XXX-W5	15V

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA= -40°C to 85°C			0.5	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High VIN to low VIN (voltage variation +/-5%)			1.2	%/%
Load Regulation(10% load to rated load)	5V output types			16	
Load Regulation(10% load to rated load)	all other types			11	

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.


GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All input types		110		kHz


TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	Derating if the temperature ≥85°C	-40		105	°C
Storage		-55		130	°C
Cooling	Free air convection				



TEMPERATURE DERATING GRAPHS

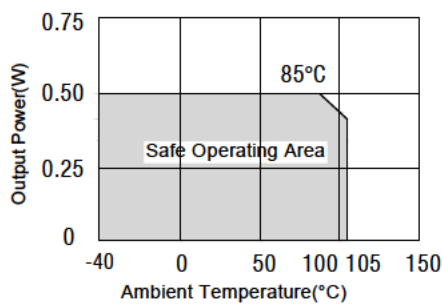

TOLERANCE ENVELOPES

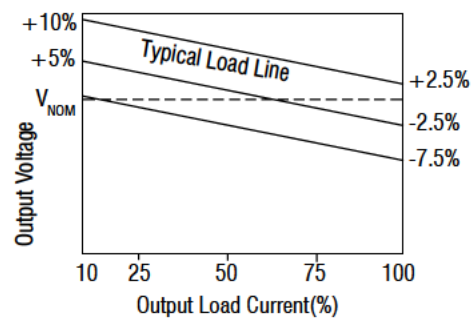

MECHANICAL DIMENSIONS

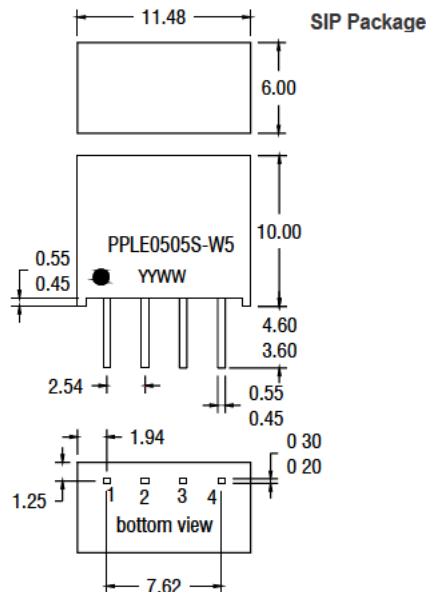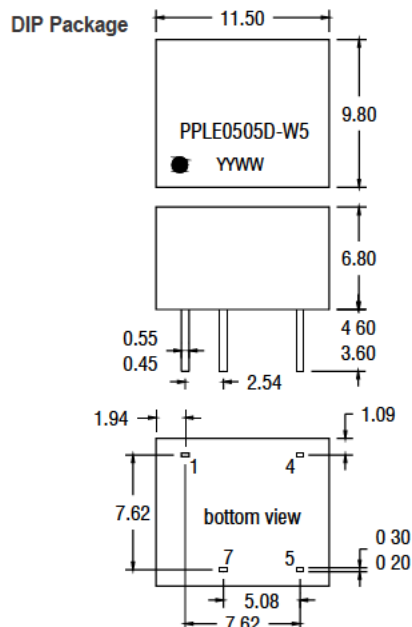

PIN CONNECTIONS


8 PIN DIP	
Pin	Function
1	-Vin
4	+Vin
5	+Vout
7	-Vout

4 PIN SIP	
Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout


All dimensions in mm±0.25mm. All pins on a 2.54mm pitch and within±0.25mm of true position.

RECOMMENDED FOOTPRINT DETAILS

8Pin DIP Package

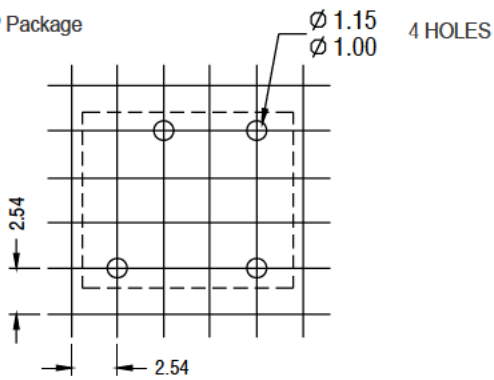


4Pin SIP Package

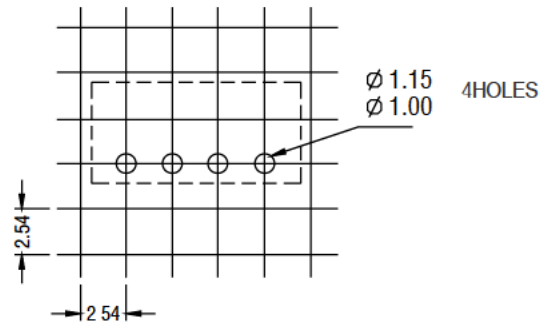


TUBE OUTLINE DIMENSIONS

8Pin DIP Tube



4Pin SIP Tube

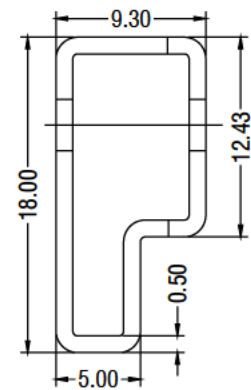

Unless otherwise stated all dimensions in mm ± 0.5 mm.

Tube length (8 Pin DIP) : 520mm ± 2 mm.

Tube length (4 Pin SIP) : 520mm ± 2 mm.

Tube Quantity : 35PCS