

# DC/DC Converter

## PN2-XXSXXA3NT Series

Typical Feature
◆ Fixed Input Voltage, isolated & Unregulated Single Output power 2W
◆ Continuous short circuit protection
◆ Operating Temperature: -40C° to +105C°
◆ Small SMD package, International standard pin-out
◆ Isolation Voltage 3000VDC
◆ High efficiency up to 86%
◆ No load input current as low as 5mA
◆ ESD meet Contact 8KV



Application Filed
<p><b>PN2-XXSXXA3NT</b> is suitable for pure digital systems, low frequency analog circuits, relay-driven circuits. It is specially designed for applications where an isolated voltage is required in a distributed power supply system. It could be widely used in the below products:</p> <ol style="list-style-type: none"> <li>1. The voltage of the input power supply is relatively stable (voltage change range:±10%Vin)</li> <li>2. Isolation between input and output is required (Isolation Voltage≤3000VDC);</li> <li>3. Low requirements for output voltage stability and output ripple noise;</li> </ol>

Typical Product List						
Part No	Input Voltage	Output Voltage/Current		Max. Capacitive Load(Max) u F	Ripple & Noise 20MHz (Typ/Max) mVp-p	Efficiency (Min/Typ) %
	(VDC)	Voltage	Current			
	Range	(VDC)	(mA) Max / Min			
PN2-3V3S05A3NT	3.3 (2.97-3.63)	5	400/40	2400	50/100	79/82
PN2-05S3V3A3NT	5 (4.5-5.5)	3.3	400/40	2400	50/100	77/80
PN2-05S05A3NT		5	400/40	2400	50/100	80/83
PN2-05S09A3NT		9	222/22	1000	80/100	82/85
PN2-05S12A3NT		12	167/17	1000	80/100	83/86
PN2-05S15A3NT		15	133/13	560	80/100	79/82
PN2-12S05A3NT		12 (10.8-13.2)	5	400/40	2400	80/100
PN2-12S12A3NT	12		167/17	560	80/100	83/86
PN2-12S15A3NT	15		133/13	560	80/100	81/84
PN2-12S24A3NT	24		83/8	470	80/100	81/84
PN2-15S05A3NT	(13.5)	5	400/40	2400	80/100	79/82
PN2-15S12A3NT	-	12	167/17	560	80/100	81/84
PN2-15S15A3NT	16.50	15	133/13	560	80/100	81/84

**DC/DC Converter**  
**PN2-XXSXXA3NT Series**

PN2-24S05A3NT	24 (21.6-26.4)	5	400/40	2400	80/100	81/84
PN2-24S09A3NT		9	222/22	1200	80/100	82/85
PN2-24S12A3NT		12	167/17	1200	80/100	83/86
PN2-24S24A3NT		24	83/8	470	80/150	81/84

Note 1: The typical output efficiency is based on that product is full loaded and burned-in after half an hour.

Note 2: The fluctuation range of full load efficiency(% ,TYP) is  $\pm 2\%$ , full load output efficiency= total output power/module's input power.

Note 3: Ripple & Noise Tested by twisted-pair method, for details please check Ripple & Noise Test Method.

**Input Specifications**

Item	Operating Condition	Min.	Typ.	Max.	Unit	
Input Current (Full load/No load)	3.3Vdc Input	3.3Vdc output	-	758/10	777/15	mA
		5Vdc/ 9Vdc output	-	739/20	758/25	
		12Vdc output	-	722/30	739/35	
		24Vdc output	-	758/40	777/50	
	5Vdc output	3.3Vdc output	-	500/5	513/12	
		5Vdc output	-	476/5	488/12	
		9Vdc output	-	465/10	476/20	
		12Vdc output	-	455/20	465/30	
		24Vdc output	-	488/30	500/40	
	12Vdc Input	5Vdc output	-	200/8	235/15	
		12Vdc output	-	190/8	235/15	
		15Vdc output	-	192/12	235/18	
		24Vdc output	-	185/10	235/15	
	15Vdc output	5Vdc output	-	160/10	180/18	
		12Vdc output	-	158/10	170/18	
		15Vdc output	-	156/10	170/18	
	24Vdc input	5Vdc output	-	100/8	120/15	
		9Vdc output	-	100/8	120/15	
		12Vdc output	-	98/8	120/15	
		24Vdc output	-	96/8	120/15	
Reflected Ripple Current	-	-	15	-		
Overshoot Voltage	3.3Vdc Input	-0.7	-	9	VDC	
	5Vdc Input	-0.7	-	11		
	12Vdc Input	-0.7	-	18		
	24Vdc Input	-0.7	-	30		

# DC/DC Converter

## PN2-XXSXXA3NT Series

Overshoot Current	-	-	0.8	-	A
Input Filter Type	-	Capacitor Filter			
Hot Plug	Unavailable				

### Output Specifications

Item	Operating Condition		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	-		See Error Envelope Curve			
Line Regulation	Input voltage change $\pm 1\%$	3.3Vdc/5Vdc output	-	-	1.5	--
		Other voltage output	-	-	1.2	
Load Regulation	10%-100% load	3.3Vdc/5Vdc output	-	15	20	%
		Other voltage output	-	10	15	
Temperature Drift Coefficient	Full load		-	-	$\pm 0.03$	%/°C
Short Circuit Protection	-		Continuous, Self-recovery			

### General Specifications

Item	Operating Condition		Min.	Typ.	Max.	Unit
Insulation Withstand Voltage	Input-output, Test 1min, leakage current $\leq 0.5\text{mA}$		3000	-	-	VDC
Insulation Resistance	Input-output, Insulation Voltage 500VDC		1000	-	-	MΩ
Isolation Capacitor	Input-output, 100KHz/0.1V		-	20	-	PF
Operating Temperature	Temperature $\geq 105^\circ\text{C}$ , see Temperature Derating Curve		-40	-	105	°C
Case Rising Temperature	Test Environment Temperature $25^\circ\text{C}$		-	15	-	
Storage Temperature	-		-55	-	135	
Reflow Temperature	Peak Value Temperature $\leq 250^\circ\text{C}$ , the maximum time is 60s for temp over $217^\circ\text{C}$					
Storage Humidity	No condensing		-	-	95	%RH
Switching Frequency	Full load	3.3Vdc/5Vdc Input	-	260	-	KHz
		12Vdc/24Vdc Input	-	450	-	
MTBF	MIL-HDBK-217F@ $25^\circ\text{C}$		3000			Khours



### Material Characteristics

Case Material	Black flame-retardant heat-resistant plastic (UL94 V-0)				
Packing Dimension	SMD Package	12.7X11.20X7.25 mm			
Product Weight		1.4g (TYP.)			
Cooling Method	Natural air cooling				

**EMC Characteristic**


EMI	CE	CISPR32/EN55032 CLASS B (EMC Recommended Circuit)
	RE	CISPR32/EN55032 CLASS B (EMC Recommended Circuit)
EMS	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±8kV perf. Criteria B

**Output Voltage Regulation Curve**

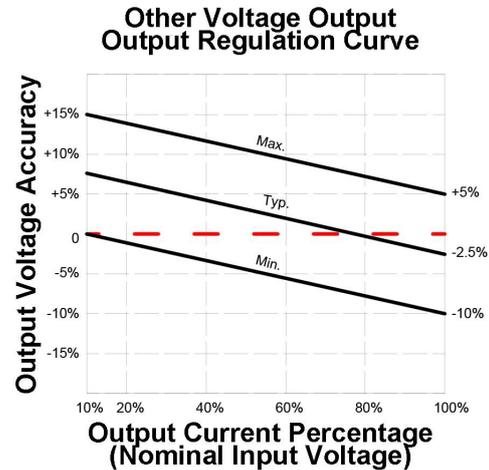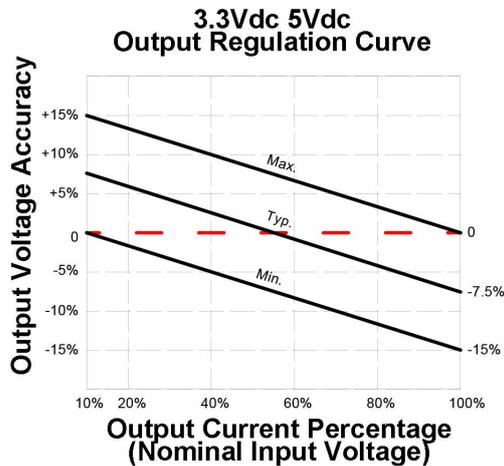

**Product Character Curve**


**Temperature Derating Curve**

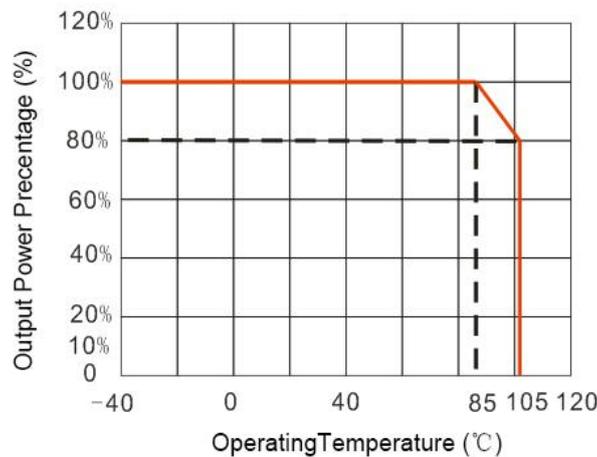

**Application Circuit**


**1. Typical Application**

In order to ensure the input/output ripple and noise decreased, capacitor filter net could be connected to input and output side, application circuit as below photo 3; choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance.

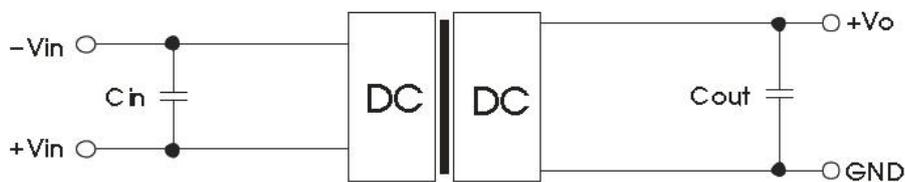

Note 1:  $C_{in}$  is 4.7uF/50V,  $C_{out}$  is 10uF/50V

**2. EMC Typical Recommended Circuit**

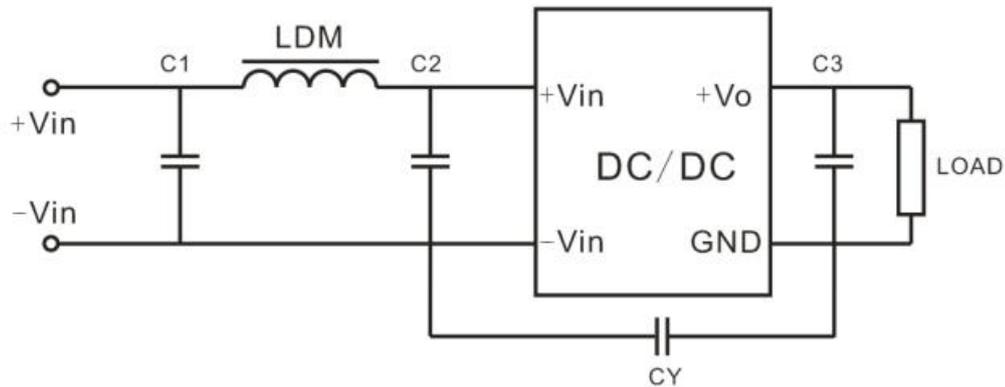

Recommended EMC Circuit


Note 2: C1, C2 is 4.7uF/50V, LDM is 6.8uH, CY is 1nF/250Vac, for C3, please refer to the Typical Circuit.

**3. Ripple & Noise Test (Twisted Pair Method 20MHZ bandwidth)**

1). 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 4.7uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

2). Ripple & Noise Test Method:




Input terminal connect to power supply, output terminal connect to electronic load through jig plate. Use 30cm±2 cm sampling line. Power line selected from corresponding diameter wire with insulation according to the flow of output current.

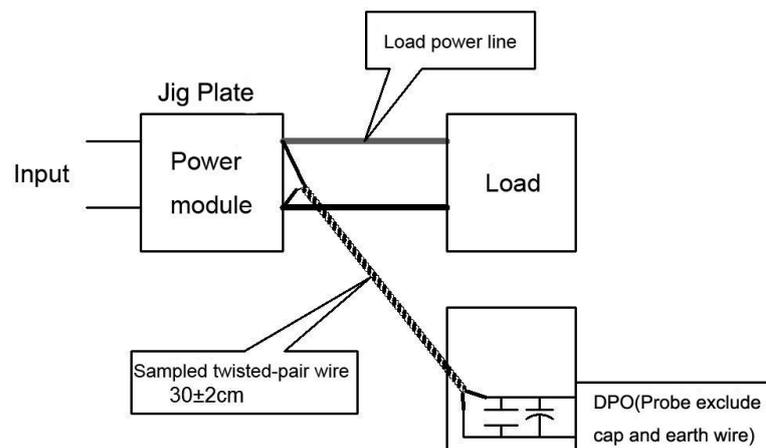

**4. Output Load Requirement**

In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 10% rated load when it is used. If the needed power is indeed small, please parallel a resistor at the output side. (The actual using power and the power of the resistor should be more than 10% rated power)

**Dimension**

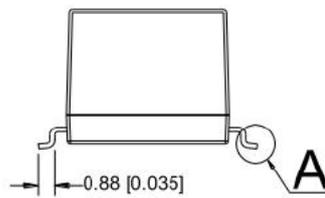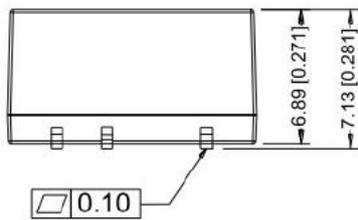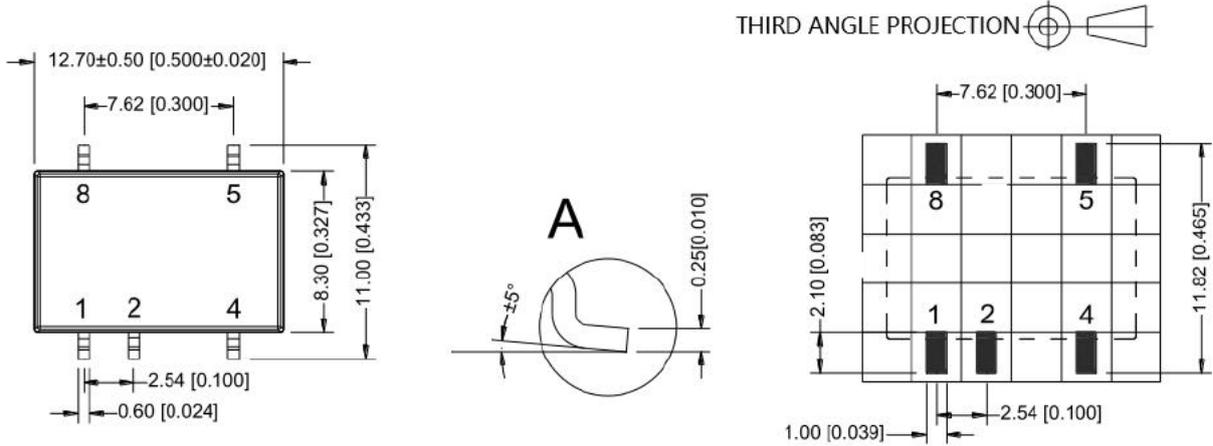



Pin-Out	
Pin	Function
1	-Vin
2	+Vin
4	GND
5	+Vo
8	NC

Note:  
 Unit:mm[inch]  
 Pin section tolerance:±0.10mm[±0.004inch]  
 General tolerance:±0.25mm[±0.010inch]

NC pin:do not connect to any external circuit

Note: if the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

**Packing**

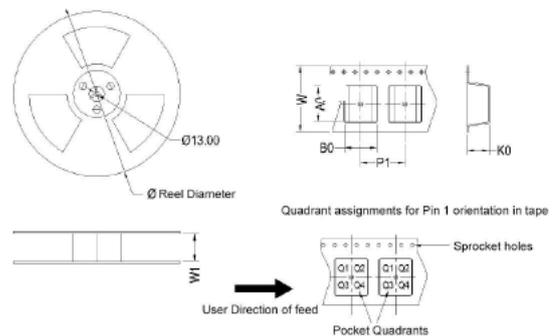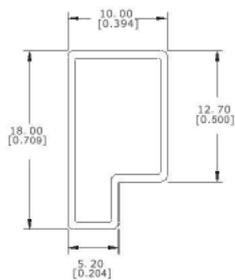

Note:  
 Unit:mm(inch)  
 General tolerance:±1.50[±0.059]  
 Single tube packing qty:39pcs  
 Carton packing qty:3120pcs  
 Size of single tube:525x18x10mm  
 Size of carton:542x110x155mm

**Package by tube**

Device	Package Type	PIN	SPO	Reel Diameter (mm)	Reel Width W1(mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	PIN1 Quadrant
PN2-XXSXXANT	SMD	5	500	330	24.5	13.1	11.7	7.5	16.0	24	Q1

**Package by taping(500pc each)**

Note:

1. If the product is operated under the min. required load, the product performance cannot be guaranteed to comply with all performance indexes in this datasheet;
2. The maximum capacitive load is tested under nominal input voltage range and full load condition;
3. Unless otherwise specified, data in this datasheet are tested under conditions of **Ta=25°C**, **humidity<75%** when inputting nominal voltage and outputting rated load (pure resistance load);
4. All index testing methods in this datasheet are based on our Company's corporate standards.
5. We can provide customized product service;